

2078S RGBW FLOODLIGHT



LUMINAIRE SPECIFICATIONS

- Power 100W
200W
- Fitting Material Non-Corrosive
Die-Cast Aluminium
- Fitting Color Dark Grey, RAL9023
- Optical Cover Tempered Glass
- Ingress Protection IP66
- Impact Protection IK08
- Power Factor >0.95
- Voltage 220 ~ 240 Vac 50 / 60Hz
- Electrical Safety Class Class I
- Operating Temperature -30 ~ +45°C
- Installation Mounting Bracket
- Beam Angle 45°
- Control Method DMX512, Constant Current

LED MODULE SPECIFICATIONS

- Color Temperature RGBW, Single
- Colour Rendering Index (CRI) ≥ 70
- LED Chips 3535 RGBW
- L70 >100,000 Hrs @ 25°C

COMPLIANCE STANDARD

- LED LM80
- Driver CE, EN550155, EN61000, EN61547
- Luminaire CE, EN60598-1, EN60598-2-1

APPLICATION

- Walkways, Parks, Gardens, Facade Lightings, Parking Areas, Commercial and Residential Areas


MEASUREMENT & ORDER CODE

WATTAGE	NO. OF LEDS	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
100W	56	360 x 355 x 220	6.37 kg
200W	84	435 x 430 x 260	11.3 kg




DIMENSION

2078S 100W

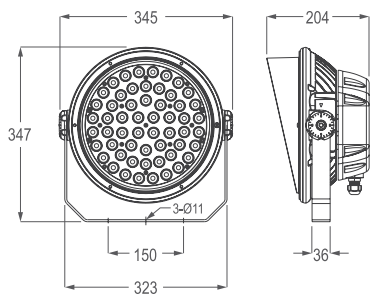


2078S 200W

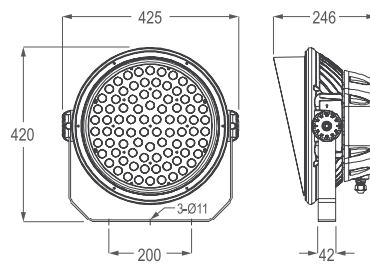

PHOTOMETRIC

45°



Note: All specifications are subject to change without prior notice for product improvement. Images are for illustrative purposes only.