


DS Series Highbay

NIKKON®





dimension

DS70150



DS25400

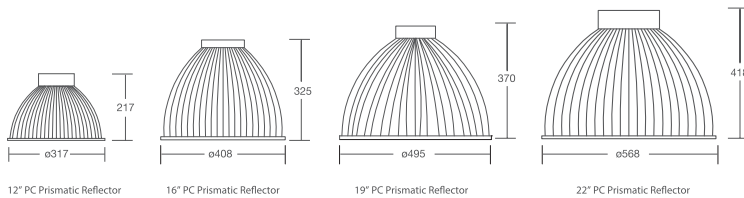

reflector & diffuser matching table

casing model	reflector type	lamp type												diffuser	order code
		metal halide				high pressure sodium				mercury vapor					
		70W	150W	250W	400W	70W	150W	250W	400W	80W	125W	250W	400W		
DS70150	12" PC	√	√			√				√	√				DS70150
DS25400	16" PC			√			√	√				√		X	DS25400
	19" PC			√			√	√				√		√	
	22" PC			√				√				√		√	
	22" PC				√				√				√	X	

* others matching are available upon request • PC : polycarbonate

X : not matching √ : matching




features

- control gear housing**
 - high quality cold rolled steel with epoxy powder coating
- power factor correction capacitor**
 - 100°C aluminium case self healing capacitor with overpressure break action mechanism
- reflector**
 - polycarbonate reflector for uniform light distribution
- polycarbonate diffuser**
 - optional diffuser can be mounted onto the reflector to give better luminance control
- others**
 - lamp holder and thermal resistant fibre glass wire


technical data

voltage • 220 - 240 Vac 50 / 60Hz
lamp wattage • 70W - 400W
holder type • E27 & E40
colour of housing • light grey

photometric curve



accessories



key for standard order coding

DS25400 - M 0250 - 22d

- Reflector & visor type
 - 12 = 12" PC reflector without diffuser
 - 22d = 22" PC reflector with diffuser
- capacity code : example = 250W
- lamp type : M = metal halide, S = high pressure sodium, H = mercury vapor
- casing model