



LUMINAIRE SPECIFICATIONS

- Power 800W
1000W
1200W
- Fitting Material Die-Cast Aluminium
- Fitting Color Gray
- Optical Cover Polycarbonate
- Ingress Protection IP66
- Impact Protection IK08
- Voltage 220 ~ 240 Vac 50 / 60 Hz
- Operating Temperature -40 ~ +50°C
- Surge Protections 10kA, 20kV

OPTIONAL FEATURES

- Beam Angle 20°
40°
60°

LED MODULE SPECIFICATIONS

- Color Temperature 5700K
- LED Chips 5050
- Color Rendering Index (CRI) Ra >80
- L70 100,000 Hrs @ 25°C

COMPLIANCE STANDARD

- LED LM80, UL, RoHS
- Driver CE, EN62384, EN61347, EN55015, EN61000

APPLICATION

- Sports & Recreational Fields, Large-Scale Outdoor Events, Industrial & Construction Sites, Parking Lots & Garages, Crane Lighting, Security & Outdoor Surveillance.

MEASUREMENT & ORDER CODE


WATTAGE	TYPICAL WATTAGE	LUMEN	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
800W	800W	118300	590 x 542.6 x 528	28.5 kg
1000W	1000W	148800	590 x 542.6 x 528	28.5 kg
1200W	1200W	177500	590 x 542.6 x 528	28.5 kg

* Please indicate LED color temperature and optic when ordering.

* All result tested base on 5700K CCT LEDs.




DIMENSION

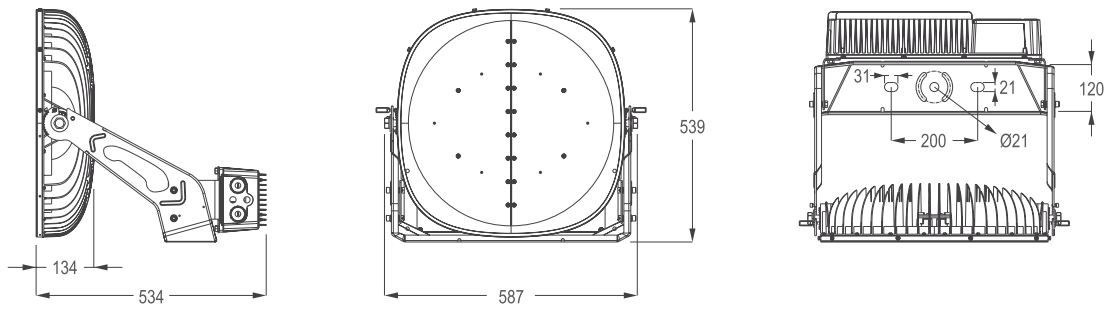


PHOTOMETRIC

20°




cd/klm
C0/C180: — C90/C270: —

40°



cd/klm
C0/C180: — C90/C270: —

60°



cd/klm
C0/C180: — C90/C270: —

Note: All specifications are subject to change without prior notice for product improvement. Images, pictures and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.