

NIKKON[®]

DRACO HELÓ HIGHBAY



HELÓ 50W



HELÓ 100W

LUMINAIRE SPECIFICATIONS

• Power	50W 100W
• Fitting Material	Non-Corrosive Die-Cast Aluminium
• Fitting Color	Black
• Optical Cover	Transparency Tempered Glass
• Ingress Protection	IP65
• Impact Protection	IK08
• Voltage	220 ~ 240 Vac 50 / 60Hz
• Electrical Safety Class	Class I
• Light Efficiency	>100 lm/W
• Power Factor	>0.9
• Operating Temperature	-30 ~ +45°C
• Installation	Hook Mounting
• Surge Protections	Yes, 4kV
• Pre-Wire	300 mm

APPLICATION

- Eateries, Retails, Hallways, Storage Rooms, Halls & Factories

LED MODULE SPECIFICATIONS

• Color Temperature	5700K Daylight
• Color Rendering Index (CRI)	>70
• L70	100,000 Hrs @ 25°C
• PCB Material	Metal Core

FEATURES

- Built-In IC Technology
- Direct AC Supply Connection (220 ~ 240 Vac 50 / 60Hz)
- No External Driver Required
- High System Efficiency
- Mid Power LEDs
- Thin & Lightweight Size
- Safety Wire
- External Surge Protection Devices (SPD)

COMPLIANCE STANDARD

• LED	LM80
• Luminaire	EN60598-1, EN60598-2-1, EN55015, EN61547, EN61000




MEASUREMENT & ORDER CODE

WATTAGE	ORDER CODE	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
50W	K14110 HELÓ 50W	5000	50	205 x 94 x 205	1.0 kg
100W	K14111 HELÓ 100W	10000	100	265 x 103 x 265	1.9 kg




DIMENSION

HELÓ 50W




HELÓ 100W

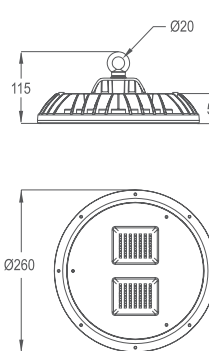


PHOTOMETRIC

HELÓ 50W



HELÓ 100W



Note: All specifications are subject to change without prior notice for product improvement. Images, pictures, and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.

NIKKON®

DRACO HELÓ HIGHBAY



HELÓ 150W



HELÓ 200W

LUMINAIRE SPECIFICATIONS

• Power	150W 200W
• Fitting Material	Non-Corrosive Die-Cast Aluminium
• Fitting Color	Black
• Optical Cover	Transparency Tempered Glass
• Ingress Protection	IP65
• Impact Protection	IK08
• Voltage	220 ~ 240 Vac 50 / 60Hz
• Electrical Safety Class	Class I
• Light Efficiency	>100 lm/W
• Power Factor	>0.9
• Operating Temperature	-30 ~ +45°C
• Installation	Hook Mounting
• Surge Protections	Yes, 8kV
• Pre-Wire	300 mm

APPLICATION

- Warehouses, Multipurpose Halls, Exhibition Halls, Production Areas & Factories

LED MODULE SPECIFICATIONS

• Color Temperature	5700K Daylight
• Color Rendering Index (CRI)	>70
• L70	100,000 Hrs @ 25°C
• PCB Material	Metal Core

FEATURES

- Built-In IC Technology
- Direct AC supply Connection (220 ~ 240 Vac 50 / 60Hz)
- No External Driver Required
- High System Efficiency
- Mid Power LEDs
- Thin & Lightweight Size
- External Surge Protection Devices (SPD)

COMPLIANCE STANDARD

• LED	LM80
• Luminaire	EN60598-1, EN60598-2-1, EN55015, EN61547, EN61000




MEASUREMENT & ORDER CODE

WATTAGE	ORDER CODE	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
150W	K14112 HELÓ 150W	15000	150	330 x 135 x 330	3.2 kg
200W	K14113 HELÓ 200W	20000	200	390 x 135 x 390	4.2 kg




DIMENSION

HELÓ 150W

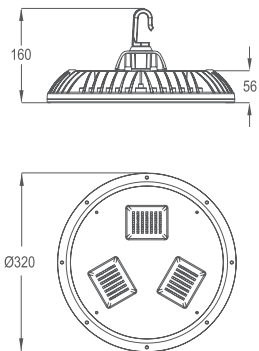


HELÓ 200W

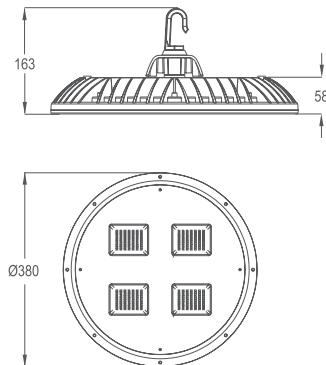


PHOTOMETRIC

HELÓ 150W



HELÓ 200W



Note: All specifications are subject to change without prior notice for product improvement. Images, pictures, and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.