

NIKKON®

HELÓ PLUS



HELÓ PLUS (S) 150W



HELÓ PLUS (M) 200W



HELÓ PLUS (L) 240W

LUMINAIRE SPECIFICATIONS

- **Selectable Wattage** 100W / 120W / 150W (S)
150W / 180W / 200W (M)
200W / 220W / 240W (L)
- **Fitting Material** Die-Cast Aluminum
- **Fitting Color** Black
- **Fitting Optic** PC Cover Lens
- **Ingress Protection** IP65
- **Impact Protection** IK08
- **Voltage** 220 ~ 240 Vac 50 / 60Hz
- **Dimming** 0-10V
- **Electrical Safety Class** Class I
- **Power Factor** >0.9
- **Operating Temperature** -40 ~ +45°C
- **Installation** Hook Mounting with Safety Rope
- **LED Driver Built-In Surge Protections** 10KV
- **Beam Angle** 90°

LED MODULE SPECIFICATIONS

- **Color Temperature** 4000K
6500K
- **Color Rendering Index (CRI)** >70
- **L70** 100,000 Hrs @ 25°C

COMPLIANCE STANDARD

- **LED** LM80
- **DRIVER** EN/IEC 61347, EN/IEC 55015, EN61547, EN/IEC61000
- **LUMINAIRE** IEC 60598-1, IEC 60598-2-1


APPLICATION

- Warehouses, Supermarket, Exhibition Center, Gym Room, Shopping Mall & Library.

MEASUREMENT & ORDER CODE


WATTAGE	ORDER CODE	SELECTABLE WATTAGE	TYPICAL LUMINOUS FLUX	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
150W	HELÓ PLUS (S) 150W	100W / 120W / 150W	14000 / 17800 / 21000	265 x 265 x 165	1.8 kg
200W	HELÓ PLUS (M) 200W	150W / 180W / 200W	21400 / 24900 / 26400	310 x 310 x 165	2.2 kg
240W	HELÓ PLUS (L) 240W	200W / 220W / 240W	27700 / 30500 / 33000	375 x 375 x 165	2.5 kg

* All result tested base on 4000K CCCT LEDs

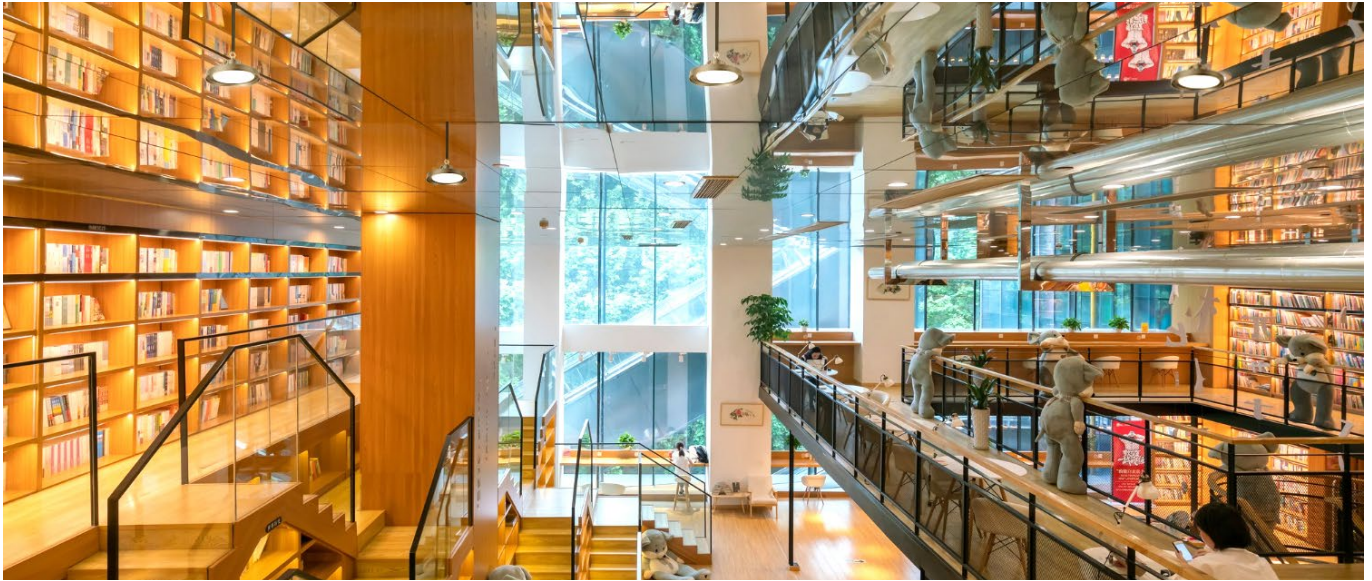


DIMENSION


HELÓ PLUS (S) 150W



HELÓ PLUS (M) 200W




HELÓ PLUS (L) 240W




PHOTOMETRIC


HELÓ PLUS (S) 150W



HELÓ PLUS (M) 200W



HELÓ PLUS (L) 240W



Note: All specifications are subject to change without prior notice for product improvement. Images, pictures and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.