


NIKKON[®]

INDUSTRIAL . COMMERCIAL . OUTDOOR
L I G H T I N G



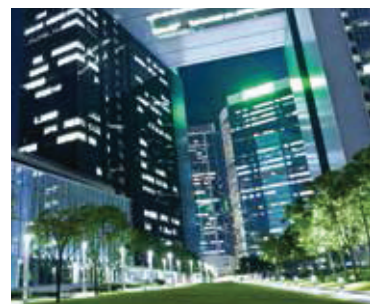

ABOUT US

NIKKON is a well-known brand in the field of industrial and street lighting, with a reputation for providing high quality products that are reliable and efficient. NIKKON offers a diverse range of industrial lighting solutions for domestic and international markets. Our range of LED lighting products encompasses street lighting, high bay and low bay, all of which boast exceptional quality, reliability and energy efficiency. They are built to withstand harsh industrial conditions.

Our NIKKON products are designed with highest quality, durability and conform to safety standards. The primary objective is to focus on assisting operators and users to save on their energy costs, optimising energy efficiency while reducing their carbon footprint which contributes to a more sustainable future.

We strive to stay up-to-date of the latest technology developments and prioritising green initiatives in our product offerings. Our proficient team of designers possesses the necessary expertise to meet our clients' expectations and support them in accomplishing their goals from the early stage of a project to its completion.

Besides, we have dedicated professional teams that provide training, services, installation, maintenance and troubleshooting. This allows us to collaborate with our customers to deliver value, experience and satisfaction as well as facilitate the development of long-term business relationships. Through this, NIKKON can leverage its expertise to meet customer needs in different markets and continue to grow its business.

Our Edge in Lighting. We Believe in Bringing You the Advantage.

Industrial Lighting Project Expertise

Our team possesses extensive industry knowledge and technical expertise, delivering customised solutions and high quality lighting for various commercial and industrial applications.

Built for Quality, Engineered for Performance

Our industrial lighting is designed to withstand harsh weather conditions while delivering reliable illumination and efficiency. We continuously develop technologies to enhance product performance and sustainability.

Comprehensive Testing Facilities

Our lab is equipped with cutting-edge manufacturing equipments and testing facilities for research, design and product testing to ensure durability and optimal functionality.

Over 45 Years of Experience in Manufacturing Excellence

A strong foundation bolstered by a skilled workforce, enhances operational efficiency, stays relevant with technologies and implements best manufacturing practices. Our production capabilities enable us to fulfill large volume orders and meet short lead times.

Awards and Accreditations

We are accredited with ISO 9001:2015 for Quality Management System (QMS) and have obtained ISO 14001:2015 for Environmental Management System (EMS) in the LED Lighting segment. We comply with industry benchmarks, ensuring economic, environmental and social responsibility.

Project Services and Sales Support

Every project is executed seamlessly from the initial concept to final delivery including technical assistance and after-sales service, ensuring completion within scope and meeting customer satisfaction.



INDUSTRIAL LIGHTING

STREET LIGHTING SERIES 01

S419	02
S159	03
S438-N	04

FLOODLIGHT SERIES 05




S1501	06
S2000	07
S2030	08
S3000	09

HIGHBAY & LOWBAY SERIES 10

AL SERIES HIGHBAY	11
DS SERIES HIGHBAY	13
NL SERIES LOWBAY	14
NIKKON SE	15

LIGHTING ACCESSORIES SERIES 16

HID LAMP BALLAST	17
IGNITOR (NYLON CASING)	18
SUPERIMPOSED IGNITOR (ALUMINIUM CASING)	19
IP43 REMOTE CONTROL GEAR	20
IP65 REMOTE CONTROL GEAR	21
INDOOR REMOTE CONTROL GEAR	22

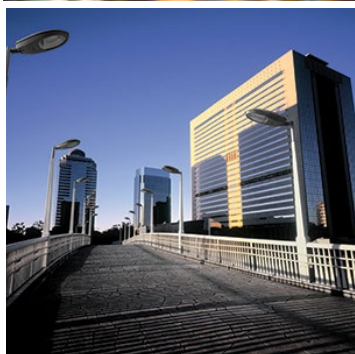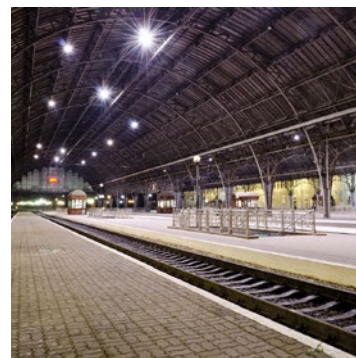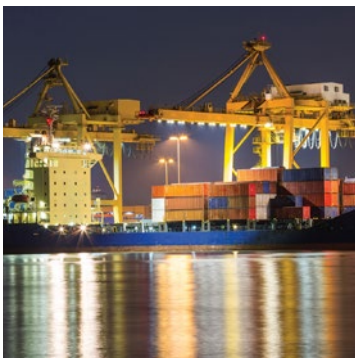

STREET LIGHTING




S419



NIKKON®



dimension

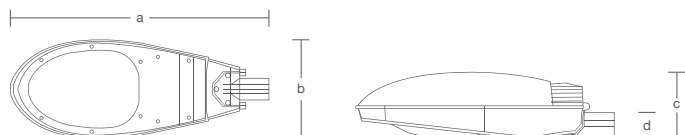

photometric curve



note : photometric result tested based on
48000lm HPS 400W clear tube

matching table

housing model	lamp type					lamp holder	casing dimension (mm)				weight (kg)	carton dimension	order code
	high pressure sodium						a	b	c	d		(L x W x H) mm	
	70W	100W	150W	250W	400W								
S419-70	√					E27	500	200	136	50	5.0	455 x 230 x 140	S419-70-S0070
S419-150	√	√	√			E27 & E40	639	269	170	50	7.5	580 x 290 x 195	S419-150-S0150
S419-250			√	√		E40	764	302	189	65	10.5	690 x 330 x 210	S419-250-S0250
S419-400				√	√	E40	880	354	260	65	15.5	820 x 375 x 230	S419-400-S0400

* metal halide & mercury vapor street lantern are available upon request.

features

electrical system

- built-in control gear suitable for HID lamps from 70W - 400W

housing

- high pressure die-cast aluminium with AKzo Nobel Interpon outdoor epoxy powder coating

glass bowl

- thermal resistant tempered glass bowl

reflector

- deep draw high purity anodized aluminium reflector

spigot

- standard spigot: 7°
suitable for side entry mounting & post-top mounting (upon request)
- customized spigot: 0° (Upon Request)
only suitable for side entry mounting

compliance and approvals

- sirim general requirement & test IEC60598-1:2003
- sirim particular requirement (street lantern) IEC60598-2-3
- TUV photometry CIE 121:1996
CIE 70 :1987
- CE marking
- TUV type test EN55015:2006 + A1 2007
EN61547:1995 + A1:2000
EN61000-3-2:2006 (class c)
EN61000-3-3:1995
+ A1, :2001 + A2, :2005
IEC60598-2-3:2002
EN60598-2-3:2003

technical data

ingress protection • IP66 (lamp compartment) & IP66 (gear compartment)
insulation class • class I (note : class II is available upon request)
voltage • 220 - 240 Vac 50 / 60Hz
lamp wattage • 70W - 400W
holder type • E27 & E40
maximum weight • 15.5kg
designed standards • IEC 60598-2-3
spigot size • ø50 mm - S419-70 & S419-150
• ø65 mm - S419-250 & S419-400

IP66
lamp compartment

IP66
gear compartment

key for standard order coding

S419 - 150 - S 0150

capacity code : example = 150W
lamp type : S = high pressure sodium
housing model

S159

NIKKON®



features

electrical system

- built-in control gear suitable for HID lamps from 70W - 150W

housing

- high pressure die-cast aluminium with AKzo Nobel Interpon outdoor epoxy powder coating

glass bowl

- thermal resistant glass bowl

reflector

- anodized aluminium reflector

spigot

- suitable for side entry mounting

technical data

ingress protection • IP66 (lamp compartment) & IP54 (gear compartment)

insulation class • class I

voltage • 220 - 240 Vac 50 / 60Hz

lamp wattage • 70W - 150W

holder type • E27 & E40

maximum weight • 5.5 kg

spigot size • Ø50 mm



IP66
lamp compartment



IP54
gear compartment




photometric curve



cd/klm
C0/C180: — C90/C270: —
note: photometric result tested based on 14500lm HPS 150W clear tube

dimension

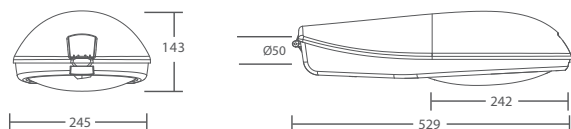

key for standard order coding

S159 - M 0070

capacity code : example = 70W

lamp type : M = metal halide
S = high pressure sodium
H = mercury vapor

casing model

order code

casing model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S159 MH 70W	tubular / bulb	E27	540 x 255 x 155	S159-M0070
S159 MH 150W	tubular / bulb	E27	540 x 255 x 155	S159-M0150
S159 HPS 70W	tubular / bulb	E27	540 x 255 x 155	S159-S0070
S159 HPS 150W	tubular	E40	540 x 255 x 155	S159-S0150
S159 HPMV 125W	bulb	E27	540 x 255 x 155	S159-H0125

S438-N

NIKKON®



features

electrical system

- built-in control gear suitable for HID lamps from 150W - 250W

body frame

- high pressure die-cast aluminium with AKzo Nobel Interpon outdoor epoxy powder coating

glass bowl

- thermal resistant tempered glass bowl

reflector

- deep draw high purity anodized aluminium reflector

spigot

- suitable for side entry mounting

compliance and approvals

- sirim general requirement & test IEC60598-1
- sirim particular requirement (street lantern) IEC60598-2-3

technical data

ingress protection • IP66 (lamp compartment) & IP54 (gear compartment)

insulation class • class 1

voltage • 220 - 240 Vac 50 / 60Hz

lamp wattage • 150W - 250W

holder type • E27 & E40

maximum weight • 8.8 kg

designed standards • IEC 60598-2-3

spigot size • $\varnothing 42$ mm - $\varnothing 48$ mm



IP66
lamp compartment




IP54
gear compartment



photometric curve



dimension



key for standard order coding

S438-N M 0150


- capacity code : example = 150W
- lamp type : M = metal halide
S = high pressure sodium
- housing model

matching table

housing model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S438-N HPS 150W	tubular	E40	675 x 315 x 190	S438-N-S0150
S438-N HPS 250W	tubular	E40	675 x 315 x 190	S438-N-S0250
S438-N MH 250W	tubular	E40	675 x 315 x 190	S438-N-M0250

NIKKON®

FLOODLIGHT

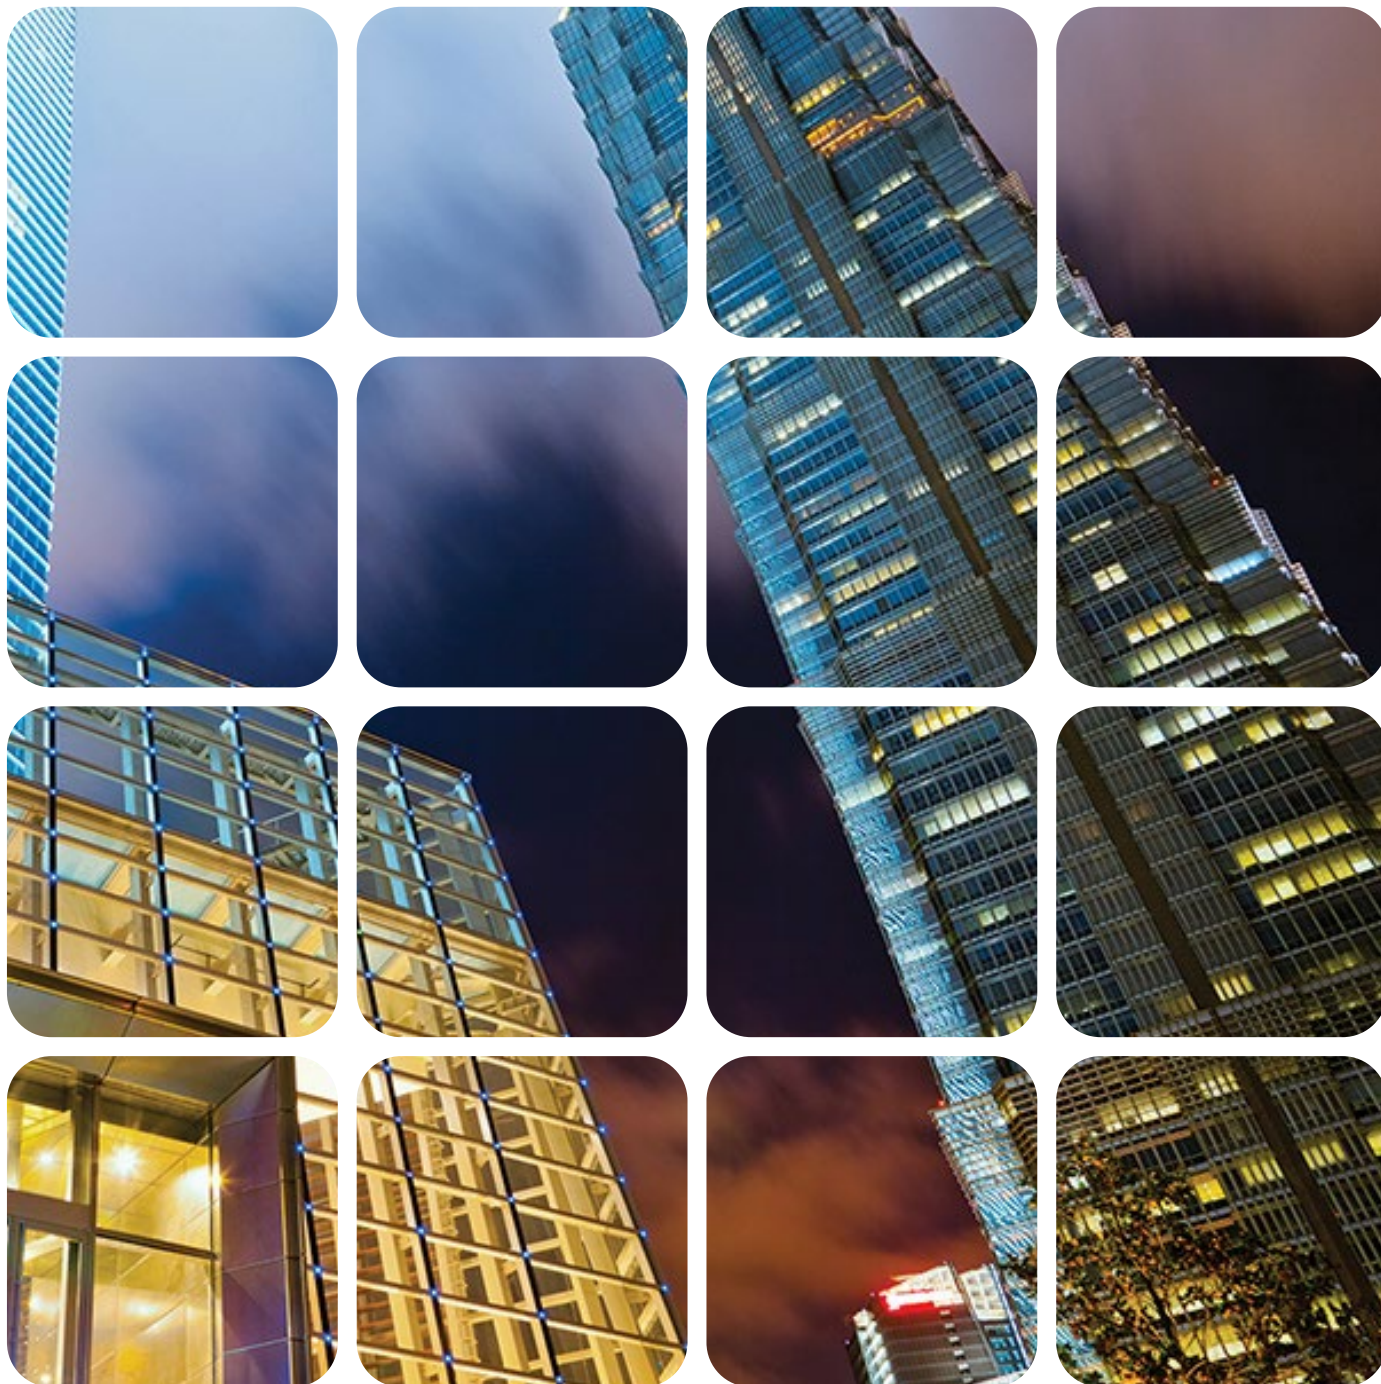

S1501

NIKKON®

220 - 240V 50 / 60Hz Rx7s



features

electrical system

- built-in control gear suitable for HID lamps from 70W - 150W

housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating

reflector

- high purity anodized hammered finish aluminium reflector

glass

- thermal resistant tempered glass

mounting bracket

- steel mounting bracket coated with epoxy powder

technical data

ingress protection • IP65

voltage • 220 - 240 Vac 50 / 60Hz



lamp wattage • 70W - 150W

holder type • RX7s

maximum weight • 5 kg


colour of housing • white & black

photometric curve



note: photometric result tested based on 11000lm MH 150W double ended tube

dimension

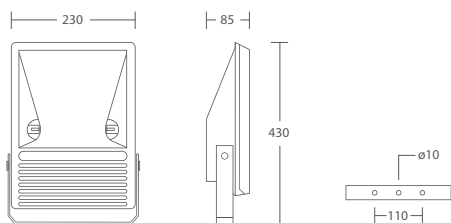

key for standard order coding

S1501	-	S	0150	capacity code	: example = 150W
				lamp type	: S = high pressure sodium : M = metal halide
				casing model	

order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S1501 MH 70W	double ended	RX7s	441 x 265 x 100	S1501-M0070
S1501 MH 150W	double ended	RX7s	441 x 265 x 100	S1501-M0150
S1501 HPS 70W	double ended	RX7s	441 x 265 x 100	S1501-S0070
S1501 HPS 150W	double ended	RX7s	441 x 265 x 100	S1501-S0150

* casing available in black and white colour.

S2000

NIKKON®

220 - 240V 50 / 60Hz E40



IP65



features

electrical system

- built-in control gear suitable for HID lamps from 250W - 400W

housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating

reflector

- high purity anodized hammered finish aluminium reflector

glass

- thermal resistant tempered glass

mounting bracket

- steel mounting bracket coated with epoxy powder

technical data

ingress protection • IP65

voltage • 220 - 240 Vac 50 / 60Hz



lamp wattage • 250W - 400W

holder type • E40

maximum weight • 9 kg


colour of housing • black

photometric curve



note : photometric result tested based on 32000lm MH 400W clear tube

dimension

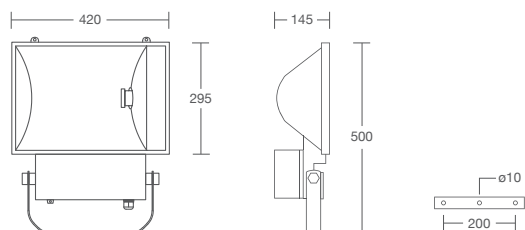

key for standard order coding

S2000 SY - M 0400	capacity code	: example = 400W
	lamp type	: S = high pressure sodium : M = metal halide
	reflector model	: SY = symmetrical : ASY = asymmetrical
	casing model	

order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S2000 SY MH 250W (2.1A)	tubular	E40	475 x 430 x 165	S2000-M0250
S2000 SY MH 400W	tubular	E40	475 x 430 x 165	S2000-M0400
S2000 SY HPS 250W	tubular	E40	475 x 430 x 165	S2000-S0250
S2000 SY HPS 400W	tubular	E40	475 x 430 x 165	S2000-S0400

* S2000 asymmetrical type floodlight is available upon request.

S2030

NIKKON®


220 - 240V 50 / 60Hz E40



IP65



CE

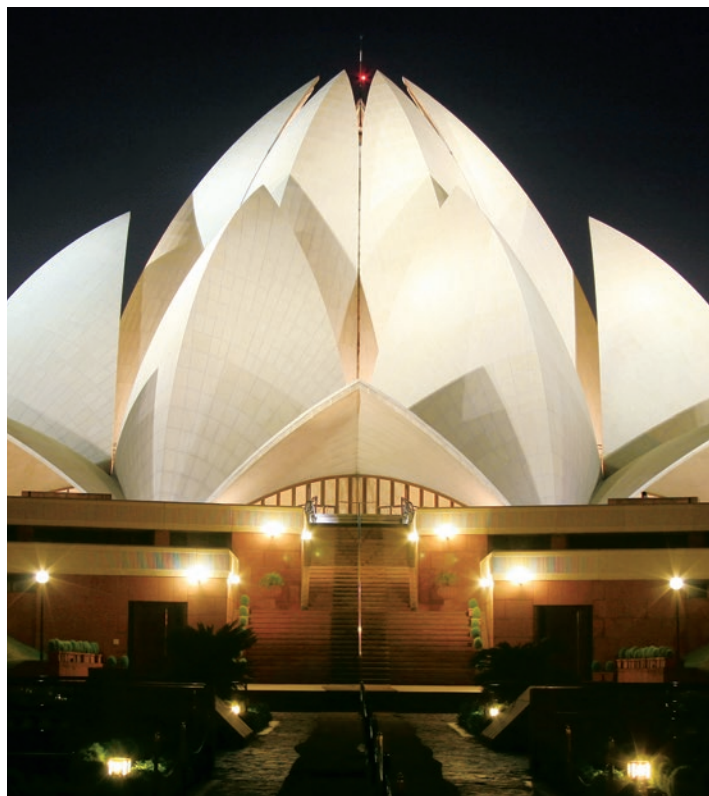

features

housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating

reflector

- high purity anodized hammered aluminium reflector

glass

- thermal resistant tempered glass

mounting bracket

- steel mounting bracket coated with epoxy powder

colour of housing

- black

technical data

ingress protection • IP65


voltage • 220 - 240 Vac 50 / 60Hz

lamp wattage • 250W - 400W


lamp holder • E40

maximum weight • 10.0 kg

photometric curve




S2030 - Wide beam



note : photometric result tested based on 32000lm MH 400W clear tube

dimension

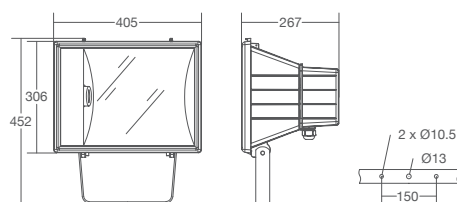

key for standard order coding

S2030 - S 0250

capacity code : example = 250W

lamp type

: S = high pressure sodium
: M = metal halide
: H = mercury vapor

casing model

order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S2030 MH 250W (2.1A)	tubular	E40	410 x 340 x 300	S2030 - M0250
S2030 MH 400W	tubular	E40	410 x 340 x 300	S2030 - M0400
S2030 HPS 250W	tubular	E40	410 x 340 x 300	S2030 - S0250
S2030 HPS 400W	tubular	E40	410 x 340 x 300	S2030 - S0400
S2030 HPMV 250W	bulb	E40	410 x 340 x 300	S2030 - H0250
S2030 HPMV 400W	bulb	E40	410 x 340 x 300	S2030 - H0400

S3000

NIKKON®


220 - 240V 50 / 60Hz E40




IP65



dimension

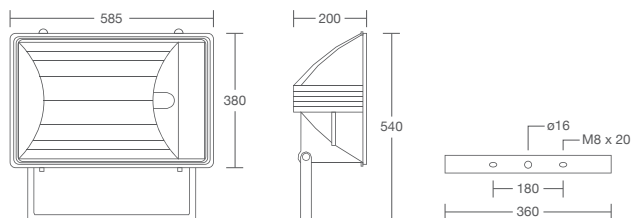

photometric curve

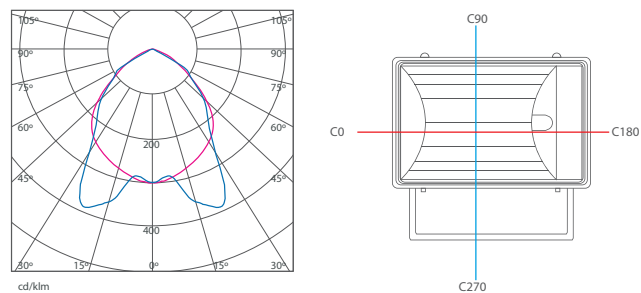

order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S3000 MH 1000W	tubular	E40	600 x 510 x 230	S3000-M1000
S3000 HPS 1000W	tubular	E40	600 x 510 x 230	S3000-S1000
accessories	housing material	IP rated	order code	
remote control gear (MH 1000W)	steel c/w epoxy powder	IP43	S5100 UC-M1000	
remote control gear (HPS 1000W)	steel c/w epoxy powder	IP43	S5100 UC-S1000	
remote control gear (MH 1000W)	die-cast aluminium	IP65	S5100 UA-M1000	
remote control gear (HPS 1000W)	die-cast aluminium	IP65	S5100 UA-S1000	


features

- housing**
 - high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating
- reflector**
 - high purity anodized hammered finish aluminium reflector
- glass**
 - thermal resistant tempered glass
- mounting bracket**
 - steel mounting bracket coated with epoxy powder
- lamp holder**
 - E40 lamp holder conforming to EN / VDE standard

technical data

ingress protection • IP65 (lamp fitting)
 voltage • 220 - 240 Vac 50 / 60Hz
 lamp wattage • MH 1000W & HPS 1000W
 holder type • E40
 floodlight maximum weight • 11.6 kg
 control gear maximum weight • S5100-M1000: 14 kg / S5100-S1000: 15.5 kg
 colour of housing • black


accessories

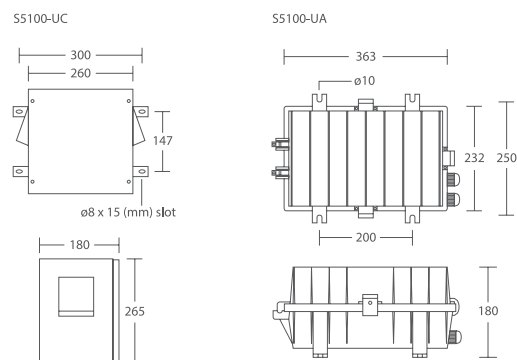

key for standard order coding

S3000 - S 1000 — capacity code : example = 1000W
 — lamp type : S = high pressure sodium
 : M = metal halide
 — casing model

HIGHBAY & LOWBAY



AL Series Highbay

NIKKON®



features

control gear housing

- high quality cold rolled steel with epoxy powder coating

power factor correction capacitor

- 100°C aluminium casing self healing capacitor with overpressure break action mechanism

reflector

- high purity anodized polished aluminium reflector

tempered glass / safety guard

- optional glass visor and wire guard can be mounted onto the reflector for safety purposes

others

- lamp holder and thermal resistant fibre glass wire

technical data


voltage • 220 - 240 Vac 50 / 60Hz

lamp wattage • 70W - 400W

holder type • E27 & E40

colour of housing • light grey

photometric curve



cd/klm

C0/C180: — C90/C270: —

note : photometric result tested based on 32000lm MH
400W coated bulb complete with 18" AL reflector

key for standard order coding

AL 25400 - M 0250 - 8718+VGAL 8718

Reflector & visor type:

12 = 12" PC reflector without diffuser
22d = 22" PC reflector with diffuser

capacity code : example = 250W

lamp type : M = metal halide
S = high pressure sodium
H = mercury vapor

casing model

AL Series Highbay

NIKKON®



dimension & attachment


reflector				visor			
model	dimension (mm)		weight (kg)	model	dimension (mm)	weight (kg)	thickness (mm)
	a	b					carton dimension (L x W x H) mm
N412G	315	ø390	0.4	N412G glass visor	ø380	0.45	5
N712G	405	ø465	0.7	N712G glass visor	ø465	2.20	5
6407	245	ø400	0.4	-	-	-	-
RAL8718	335	ø470	0.6	RAL8718 glass visor	ø465	2.20	5
RAL15MFWR	286	ø401	0.5	RAL15MFWR glass visor	ø401	1.70	5
RAL18MFWR	335	ø476	0.8	RAL18MFWR glass visor	ø476	2.40	5

Aluminium Reflector

AL70150

AL25400

Glass Visor

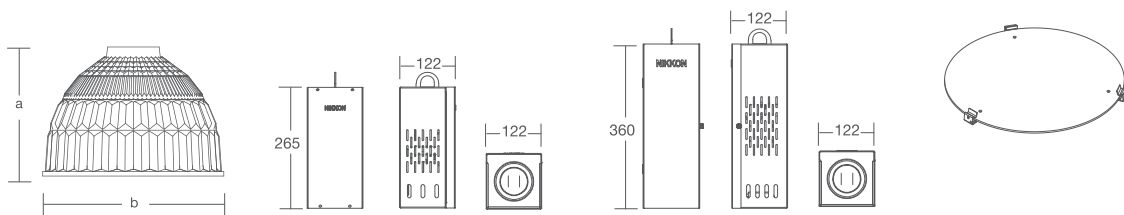

matching table

casing model	reflector type	lamp type												visor	guard
		metal halide				high pressure sodium				mercury vapor					
		70W	150W	250W	400W	70W	150W	250W	400W	80W	125W	250W	400W		
N712G AL70150 / AL25400	N412G	✓	✓	✓		✓	✓	✓		✓	✓	✓		✓	✓
				✓	✓			✓	✓			✓	✓	✓	✓
	6407	✓	✓	✓		✓	✓	✓		✓	✓	✓		x	✓
	RAL8718			✓	✓			✓	✓			✓	✓	✓	✓
	RAL15MFWR	✓	✓	✓		✓	✓	✓		✓	✓	✓		✓	✓
	RAL18MFWR			✓	✓			✓	✓			✓	✓	✓	✓

x : not matching √ : matching

NIKON®



casing model	reflector type	lamp type												diffuser	order code
		metal halide				high pressure sodium				mercury vapor					
		70W	150W	250W	400W	70W	150W	250W	400W	80W	125W	250W	400W		
DS70150	12" PC	✓	✓			✓				✓	✓				DS70150
DS25400	16" PC			✓			✓	✓				✓		X	DS25400
	19" PC			✓			✓	✓				✓		✓	
	22" PC			✓				✓				✓		✓	
	22" PC				✓				✓				✓	X	

X : not matching $\checkmark$: matching

DS25400 - M 0250 - 22d

- Reflector & visor type
 - 12 = 12" PC reflector without diffuser
 - 22d = 22" PC reflector with diffuser
- capacity code : example = 250W
- lamp type : M = metal halide
S = high pressure sodium
H = mercury vapor
- casing model


NL Series Lowbay

NIKKON®




dimension


model	width	depth	height	opening hole
NL 150-RMS	400 mm	150 mm	400 mm	345 x 345 mm
NL 400-RMS	500 mm	230 mm	500 mm	420 x 420 mm
NL 150-SMS	345 mm	150 mm	345 mm	-
NL 400-SMS	420 mm	230 mm	420 mm	-
NL 150-SMR	250 mm	150 mm	430 mm	-
NL 400-SMR	320 mm	195 mm	600 mm	-



NL SERIES SMS



NL SERIES RMS



NL SERIES SMR

matching table

model	lamp type								carton dimension			
	metal halide				high pressure sodium				mercury vapor			
	70W	150W	250W	400W	70W	150W	250W	400W	80W	125W	250W	400W
NL 150-RMS	√	√			√	√			√	√		
NL 400-RMS			√	√			√	√			√	√
NL 150-SMS	√	√			√	√			√	√		
NL 400-SMS			√	√			√	√			√	√
NL 150-SMR	√	√			√	√			√	√		
NL 400-SMR			√	√			√	√			√	√

RMS : recessed mount square • SMS : surface mount square • SMR : surface mount rectangular

x : not matching √ : matching

features

electrical system

- built-in control gear suitable for HID lamp from 70W - 400W with well ventilated control gear compartment

reflector

- high purity aluminium reflector with hammered/clear polished surface

glass

- thermal resistant tempered glass

others

- lamp holder and thermal resistant fibre glass wire

technical data


voltage • 220 - 240 Vac 50 / 60Hz

lamp wattage • 70W - 400W

holder type • E27 / E40

colour of housing • white

photometric curve



cd/klm

C0/C180:

note : photometric result tested based on 19000lm MH 250W coated bulb

key for standard order coding

NL400 RMS - M 0250

capacity code : example = 250W

lamp type : M = metal halide
S = high pressure sodium
H = mercury vapor

model

NIKKON SE Highbay

NIKKON®


N412G 15"
Reflector



8718 18"
Reflector



dimension

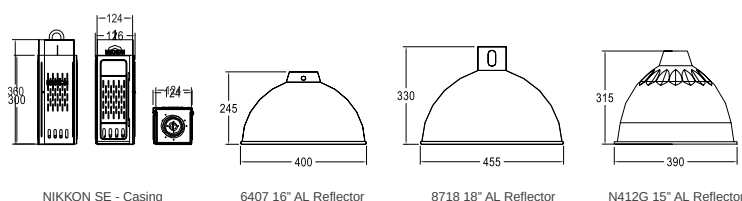


features

- control gear housing**
 - high quality cold rolled steel complete with epoxy powder coating
- reflector**
 - High purity anodized polished aluminium reflector
- tempered glass**
 - optional visor can be mounted onto the reflector to provide safety purpose when used in public areas
- others**
 - ceramic lamp holder and thermal resistant fiber glass wire

technical data


voltage • 220 ~ 240 Vac 50Hz
 lamp wattage • 250W ~ 400W
 holder type • E40 ceramic lamp holder
 colour of housing • light grey

photometric curve




note: photometric result tested based on 24000lm HPMV 400W coated bulb c/w 8718 18" aluminium reflector

installation diagram

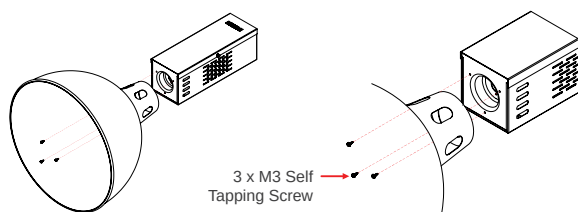

key for standard order coding

NIKKON SE - M - 0250 - 8718

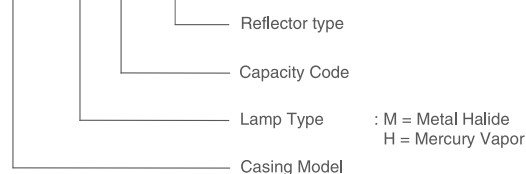

order code

casing model	lamp type	weight (kg)	order code
NIKKON SE	HPMV 250	4.3	NIKKON SE - H 0250
	HPMV 400	4.8	NIKKON SE - H 0400
	MH 250	4.4	NIKKON SE - M 0250
	MH 400	5.4	NIKKON SE - M 0400
reflector	model	weight (kg)	order code
aluminium reflector	N412G (15")	0.4	N412G
	6407 (16")	0.4	6407
	8718 (18")	0.6	8718

LIGHTING ACCESSORIES




HID Lamp Ballast

NIKKON®



wiring diagram

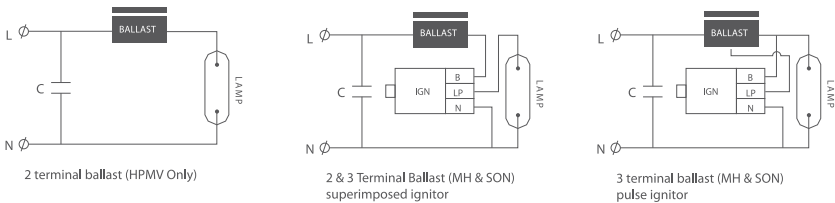

technical data


model	capacity (W)	load current (A)	power factor (pf.)	tw (°C)	Δt (°C)	capacitor (μF)	watt loss (W)	dimension (mm)					type	weight (kg)	carton dimension (L x W x H) mm
								a	b	c	d	e			
sodium/ metal halide	35	0.53	0.38	130	70	10	12	96	87	56	70	70	A	1.00	310 x 220 x 85
	70	0.98	0.38	130	70	10	12	96	87	56	70	70	A	1.24	315 x 215 x 80
	100	1.20	0.43	130	70	15/16	15	96	87	56	70	70	A	1.45	313 x 213 x 80
	150(LT)	1.80	0.40	130	70	20	18	115	106	56	70	70	A	2.06	255 x 200 x 80
	250	3.00	0.42	130	70	30	25	110	102	82	99	85	A	3.76	285 x 255 x 115
sodium	600	6.20	0.43	130	70	50/60	38	166	140	97	130	130	B	8.82	235 x 165 x 145
	400	4.40	0.44	130	80	50	30	142	132	82	99	93	A	4.30	290 x 250 x 115
	1000	10.30	0.42	130	70	100	74	218	158	95	133	114	B	12.0	240 x 170 x 150
metal halide	250	2.13	0.52	130	70	20	22	120	106	56	70	70	A	2.45	290 x 250 x 130
	400	3.25	0.54	130	70	30	30	110	102	82	99	85	A	3.72	290 x 250 x 130
	1000	8.20	0.54	130	75	70	53	166	140	97	130	130	B	10.80	245 x 170 x 145
	2000	15.60	0.52	130	85	115	122	190	160	112	152	130	C	14.72	240 x 170 x 150
	2000(415V)	9.50	0.49	130	75	50	130	190	160	112	152	130	C	15.04	240 x 160 x 150
mercury	80	0.80	0.48	130	70	10	10	96	87	56	70	70	A	1.32	310 x 220 x 85
	125	1.15	0.54	130	70	10	15	96	87	56	70	70	A	1.40	310 x 220 x 85
	250	2.15	0.52	130	70	15/16	22	110	102	82	98	88	A	2.72	290 x 250 x 125
	400	3.25	0.54	130	70	25/30	24	110	102	82	98	88	A	3.28	290 x 250 x 125
	700	5.60	0.50	130	70	50	35	185	177	82	100	93	A	6.40	300 x 250 x 120
	1000	7.00	0.60	130	75	50	37	185	177	82	100	93	A	7.52	290 x 250 x 130

features


- rate supply voltage**
 - 220V, 230V, 240V, 380V, 400V, & 415V
- 50Hz / 60Hz
- max. permissible temperature rise (Δt)**
 - 70 - 85°C
- rated max. operation temperature (tw)**
 - 130°C
- insulation temperature rating**
 - class H (copper)
 - class F (aluminium)
- manufacturing standard**
 - IEC61347-2-9:2003, IEC 61347-1:2003 & IEC 60923:2008
- accreditations and certifications**
 - international : CE marking
 - domestic : SIRIM, TNB, JKR, SESCO

dimension


type A

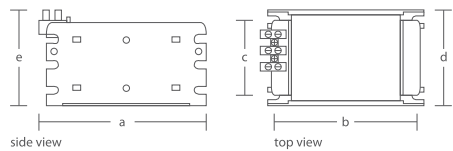

type B

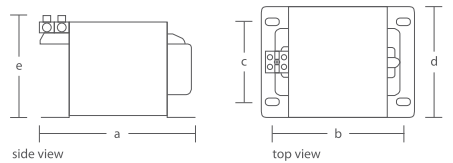


type C

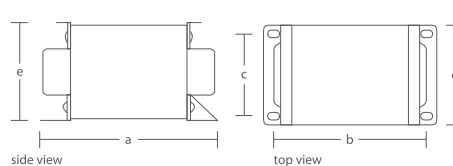

Ignitor (Nylon Casing)


NIKKON®

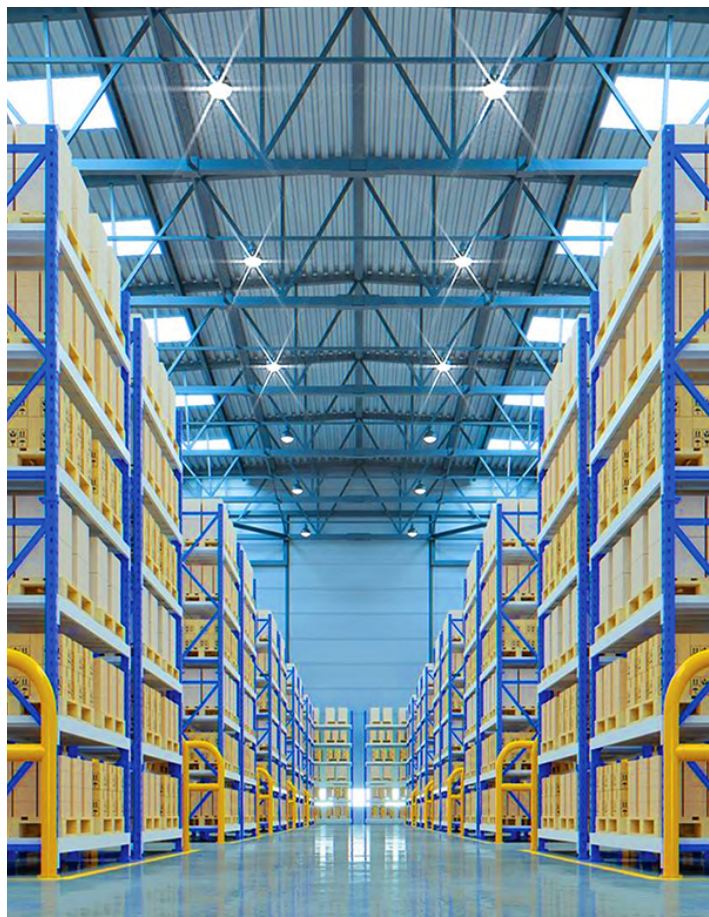


features

- main voltage**
 - 220V - 240V 50Hz / 60Hz
- single point fixing**
 - nylon casing with M8 fastening
- maintenance free**
- fully electronic control**
- manufacturing standard**
 - MS IEC 61347-1:2003, MS IEC 61347-2-1:2003 & MS IEC 60927:2003
- accreditations and certifications**
 - international : CE marking
 - domestic : SIRIM

dimension

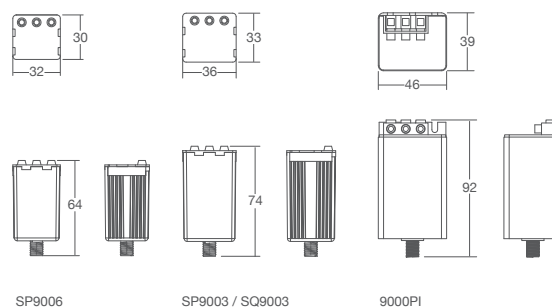

wiring diagram

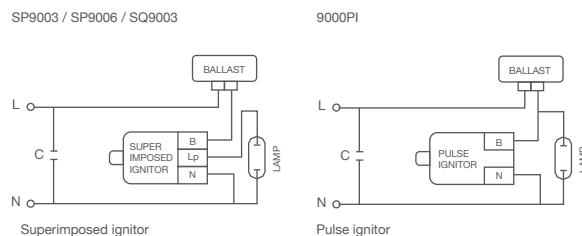

technical data

model	input voltage (V)	frequency	ignition voltage	max housing temperature	weight (kg)	min operating temperature
9000 PI	220 - 240	50/60Hz	4.0 - 5.0 KV	90°C	0.076	-30°C
SP 9003	220 - 240	50/60Hz	3.5 - 4.5 KV	85°C	0.130	-30°C
SP 9006	220 - 240	50/60Hz	3.5 - 3.8 KV	90°C	0.060	-30°C

for domestic market

model	input voltage (V)	frequency	ignition voltage	max housing temperature	weight (kg)	min operating temperature
SQ 9003	220 - 240	50/60Hz	3.5 - 4.5 KV	85°C	0.130	-30°C

order code

model	ignitor type	lamp type	carton dimension (L x W x H) mm	order code
9000PI	pulse	MH 250 - 2000W / HPS 150 - 1000W	300 x 220 x 115	9000PI
SP 9003	superimposed	MH / HPS 70W - 400W	260 x 190 x 200	SP 9003
SP 9006	superimposed	MH / HPS 70W - 150W	260 x 190 x 200	SP9006

for domestic market

order code

model	ignitor type	lamp type	carton dimension (L x W x H) mm	order code
SQ 9003	superimposed	MH / HPS 70W - 400W	260 x 190 x 200	SQ 9003

Superimposed Ignitor (Aluminium Casing)

NIKKON®



features

main voltage

- 220V - 240V 50Hz / 60Hz

single point fixing

- aluminium casing with M8 fastening

maintenance free

- fully electronic control

timer cut-off (for SP 9008T)

- able to detect lamp failure or end of lamp life and cut-off striking voltage


manufacturing standard

- IEC 60926 & IEC 60927


accreditations and certifications

- international : CE marking
- domestic : SIRIM, TNB, JKR, SESCO

dimension



wiring diagram



technical data

ignitor model	input voltage (V)	frequency	ignition voltage	max housing temperature	min operating temperature	weight (kg)	diameter b	length a
SP 9008	220 - 240	50/60Hz	2.8 - 5.0 KV	105°C	-30°C	0.14	36 mm	95 mm
SP 9008T	220 - 240	50/60Hz	2.8 - 5.0 KV	105°C	-30°C	0.14	36 mm	120 mm
SP 9009	220 - 240	50/60Hz	3.0 - 4.0 KV	105°C	-30°C	0.36	55 mm	92 mm
SP 9011	380 - 415	50/60Hz	4.0 - 5.0 KV	105°C	-30°C	0.32	55 mm	92 mm

order code

model	ignitor type	timer protection	suitable lamp type	IP rated	carton dimension (L x W x H) mm	order code
SP 9008	superimposed	-	MH & HPS 100W - 400W	IP65	270 x 230 x 200	SP 9008
SP 9008T	superimposed	cut off	MH & HPS 100W - 400W	IP65	260 x 185 x 200	SP 9008T
SP 9009	superimposed	-	HPS 1000W & MH 1000W - 2000W	IP65	300 x 200 x 260	SP 9009
SP 9011	superimposed	-	HPS 1000W & MH 1000W - 2000W	IP65	300 x 190 x 150	SP 9011

NIKON®





housing

- ## technical data

dimension

S5100-UC




S5100 U C -M 1000

20

IP65 Remote Control Gear

NIKKON®

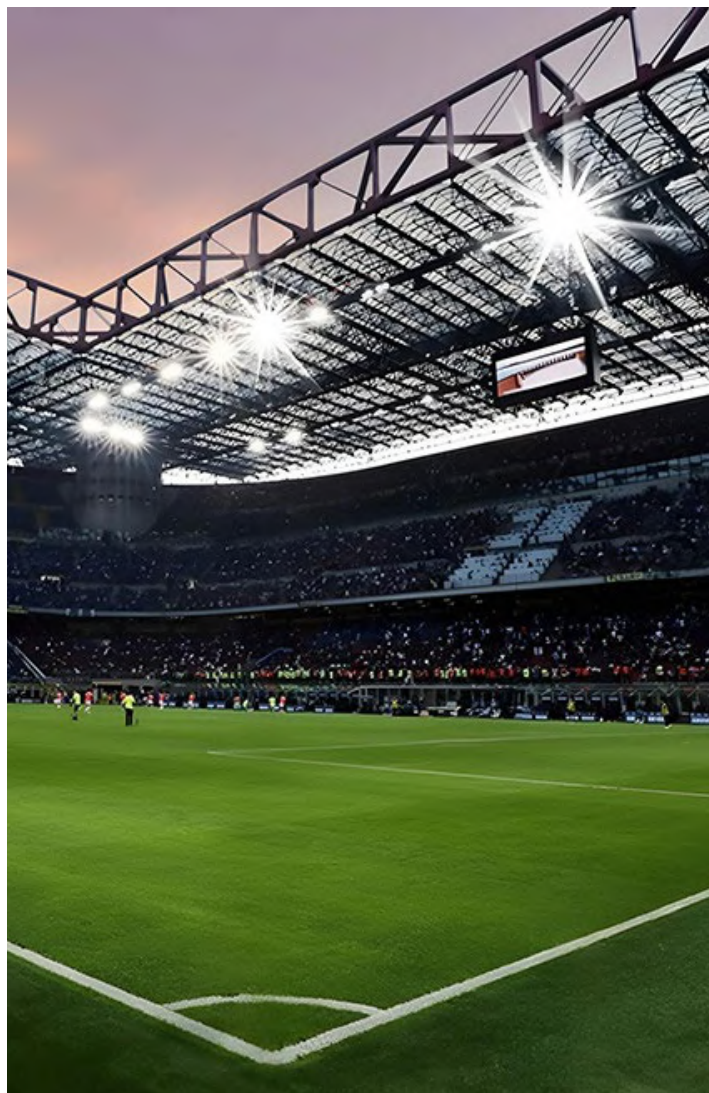

features

housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating


technical data

ingress protection • IP65
voltage • 220 - 240 Vac 50 Hz / 60Hz
lamp wattage • 1000W - 2000W
colour of housing • black
weight • MH 1000W - 14 kg
 • MH 2000W - 19.5 kg
 • HPS 1000W - 15.5 kg

dimension

key for standard order coding

S5200 U A -M 2000

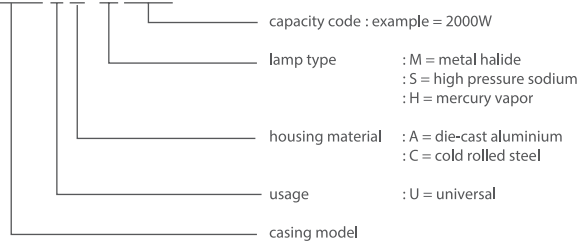

order code

model	lamp watt	lamp type	IP rated	carton dimension (L x W x H) mm	order code
S5100 - UA	1000W	MH / HPS / HPMV	IP65	410 x 285 x 205	S5100 - UA
S5150 - UA	1500W	MH	IP65	410 x 285 x 205	S5150 - UA
S5200 - UA	2000W	MH	IP65	410 x 285 x 205	S5200 - UA

Indoor Remote Control Gear

NIKKON®



features

electrical system

- remote control gear suitable for ceramic HID lamps from 35W - 150W with ventilated design compartment

housing


- epoxy powder coated body to increase the reliability of the enclosure

technical data

voltage • 220 - 240 Vac 50 / 60Hz
 lamp wattage • HID 35W - 150W
 colour of housing • light grey
 weight • 35W - 1.8 kg
 • 70W - 2.0 kg
 • 150W - 2.9 kg


dimension

remote control gear

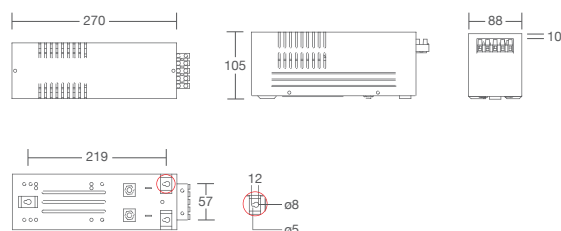

key for standard order coding

S5035 I C - M 0150

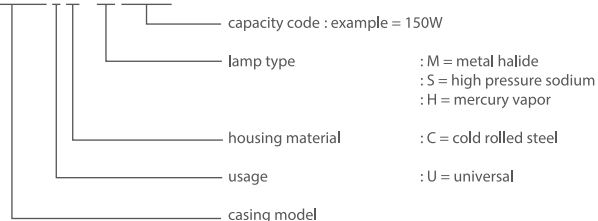

applicable lamp type

brand	lamp type
Philips CDM Master Color	E27 par bulb, G12 single ended, RX7s double ended
GE Constant Color	E27 par bulb, G12 single ended, RX7s double ended
Osram POWERBALL	E27 par bulb, G12 single ended, RX7s double ended
EYE CERA ARC / COLOR ARC	E27 par bulb, G12 single ended, RX7s double ended

order code

model	lamp watt	lamp type	carton dimension (L x W x H) mm	order code
S5035 - IC	35W	MH / HPS / HPMV	290 x 96 x 113	S5035 - IC
S5007 - IC	70W	MH / HPS / HPMV	290 x 96 x 113	S5007 - IC
S5015 - IC	150W	MH / HPS / HPMV	290 x 96 x 113	S5015 - IC



HQ, MALAYSIA

SUCCESS ELECTRONICS & TRANSFORMER MANUFACTURER SDN. BHD.

199001009281 (200853-K)

(A wholly owned subsidiary of Success
Transformer Corporation Berhad)

Tel : +603 6279 2800
Fax : +603 6157 2722
Website : www.success.com.my
www.nikkonlighting.com

SALES ENQUIRY

Domestic : ses@success.com.my
Overseas : export@success.com.my

GLOBAL NETWORKS

SINGAPORE

NIKKON LIGHTING & ELECTRICAL PTE. LTD.

Tel : +65 6742 4377
Fax : +65 6742 4366
Email : enquiry@nikkonlighting.com.sg
Website : www.nikkonlighting.com.sg

SINGAPORE

SUCCESS TRANSFORMER PTE. LTD.

Tel : +65 6742 4808
Fax : +65 6742 4708
Email : enquiry.stpl@success.com.my
Website : www.qpstransformers.com

INDONESIA

PT BOXON NIKKON JAYAINDO

Tel : +62 21 2265 2860
Fax : +62 21 2265 2745
Email : marketing@nikkonlighting.co.id
Website : www.nikkonlighting.co.id

THAILAND

NIKKON LIGHTING (THAILAND) CO., LTD.

Email : export@success.com.my
Website : www.nikkonlighting.com



NIKKON® is a registered trademark of Success Electronics & Transformer Manufacturer Sdn. Bhd. (Success) in Malaysia and other countries. Success is a private limited company wholly owned by Success Transformer Corporation Berhad (STC). The company is incorporated in Malaysia with business registration number 199001009281 (200853-K) since 1980. Success is focusing in designing and distribution of industrial lighting, transformers & electrical apparatus and having its principal place of business at No. 3, 5 & 7, Jalan TSB 8, Taman Industri Sungai Buloh, 47000 Sungai Buloh, Selangor Darul Ehsan, West Malaysia.