

IP65 Remote Control Gear

NIKKON®



features

housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating


technical data

ingress protection • IP65
voltage • 220 - 240 Vac 50 Hz / 60Hz
lamp wattage • 1000W - 2000W
colour of housing • black
weight • MH 1000W - 14 kg
 • MH 2000W - 19.5 kg
 • HPS 1000W - 15.5 kg

dimension

key for standard order coding

S5200 U A -M 2000

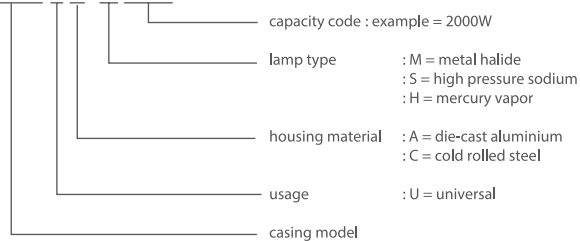

order code

model	lamp watt	lamp type	IP rated	carton dimension (L x W x H) mm	order code
S5100 - UA	1000W	MH / HPS / HPMV	IP65	410 x 285 x 205	S5100 - UA
S5150 - UA	1500W	MH	IP65	410 x 285 x 205	S5150 - UA
S5200 - UA	2000W	MH	IP65	410 x 285 x 205	S5200 - UA