

NIKON®

MURA

STREET LANTERN SERIES



NIKKON®

MURA-S STREET LANTERN



MURA-S



LUMINAIRE SPECIFICATIONS

- Power 30W
40W
50W
- Fitting Material Non-Corrosive-
Die Cast Aluminium
- Fitting Color White Aluminium, RAL9006
- Optical Cover Clear Tempered Glass
- Ingress Protection IP66
- Impact Protection IK08
- Voltage 220-240Vac 50 / 60Hz
- Electrical Safety Class Class 1
Class 2 (Upon Request)
- Operating Temperature -30 ~ +45°C
- Installation Pole Top, Side Entry Ø60mm
- Surge Protection 10KV, 20KA
- Beam Angle 150° x 80° / Type II

LED MODULE SPECIFICATIONS

- LED Chips LUMILEDS 5050
- Color Temperature 3000K, 4000K, 5000K
- Color Rendering Index (CRI) >70
- L70 100,000 Hrs @ 25°C
- PCB Material Metal Core

FEATURES

- Clip Tool Free Opening
- Dimming 1-10V
- Spigot Adjustable 0-10°
- Nema Socket 7-pin (Upon Request)

COMPLIANCE STANDARD

- LED LM80, UL, RoHS
- Driver CE, EN62493, EN61347, EN50581,
EN55015, EN61000, EN61547,
EN62384

APPLICATION

- Pathways, Foot Paths, Parks, Car Parks, Access Ways,
Road Lightings, Residential Areas


MEASUREMENT & ORDER CODE

WATTAGE	LED QUANTITY	TYPICAL FLUX, LM	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H)mm	NETT WEIGHT
30W	18	4500	32W	585 x 285 x 180	4.7kg
40W	18	5400	40W	585 x 285 x 180	4.7kg
50W	18	6800	52W	585 x 285 x 180	4.7kg

* All measurement is base on 5000K CCT


DIMENSION

MURA-S

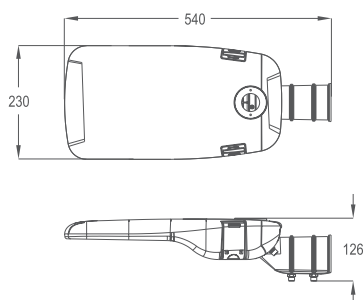

PHOTOMETRIC

MURA-S 40W



NIKKON®

MURA-M STREET LANTERN



MURA-M



LUMINAIRE SPECIFICATIONS

- Power 60W
80W
100W
- Fitting Material Non-Corrosive-
Die Cast Aluminium
- Fitting Color White Aluminium, RAL9006
- Optical Cover Clear Tempered Glass
- Ingress Protection IP66
- Impact Protection IK08
- Voltage 220-240Vac 50 / 60Hz
- Electrical Safety Class Class 1
Class 2 (Upon Request)
- Operating Temperature -30 ~ +45°C
- Installation Pole Top, Side Entry Ø60mm
- Surge Protection 10KV, 20KA
- Beam Angle 150° x 80° / Type II

LED MODULE SPECIFICATIONS

- LED Chips LUMILEDS 5050
- Color Temperature 3000K, 4000K, 5000K
- Color Rendering Index (CRI) >70
- L70 100,000 Hrs @ 25°C
- PCB Material Metal Core

FEATURES

- Safety Cut-Off Switch
- Clip Tool Free Opening
- Dimming 1-10V
- Spigot Adjustable 0-10°
- Nema Socket 7-pin (Upon Request)

COMPLIANCE STANDARD

- LED LM80, UL, RoHS
- Driver CE, EN62493, EN61347, EN50581,
EN55015, EN61000, EN61547,
EN62384

APPLICATION

- Pathways, Foot Paths, Parks, Car Parks, Access Ways,
Road Lightings, Residential Areas


MEASUREMENT & ORDER CODE

WATTAGE	LED QUANTITY	TYPICAL FLUX, LM	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H)mm	NETT WEIGHT
60W	24	8700	63W	685 x 345 x 180	6.5kg
80W	32	11600	84W	685 x 345 x 180	6.8kg
100W	40	14500	105W	685 x 345 x 180	6.9kg

* All measurement is base on 5000K CCT


DIMENSION

MURA-M

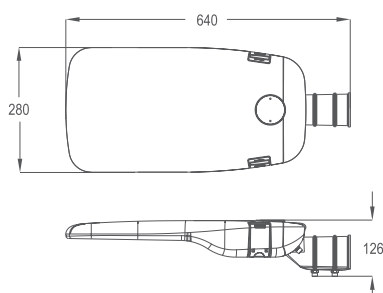

PHOTOMETRIC

MURA-M 100W




NIKKON®

MURA-L STREET LANTERN



MURA-L

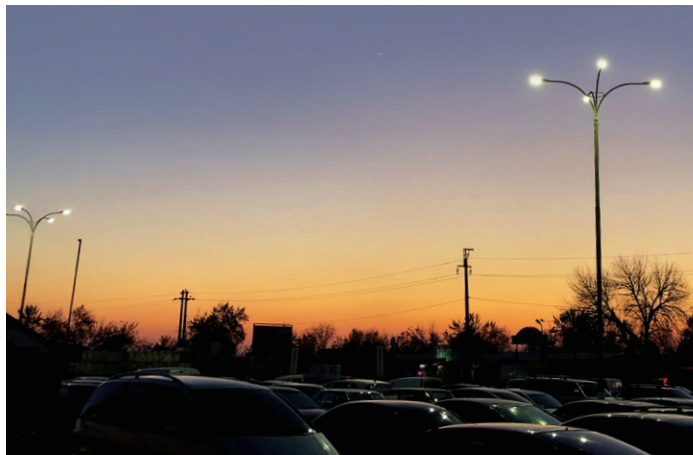

LUMINAIRE SPECIFICATIONS

- Power 120W
150W
180W
- Fitting Material Non-Corrosive-
Die Cast Aluminium
- Fitting Color White Aluminium, RAL9006
- Optical Cover Clear Tempered Glass
- Ingress Protection IP66
- Impact Protection IK08
- Voltage 220-240Vac 50 / 60Hz
- Electrical Safety Class Class 1
Class 2 (Upon Request)
- Operating Temperature -30 ~ +45°C
- Installation Pole Top, Side Entry Ø60mm
- Surge Protection 10KV, 20KA
- Beam Angle 150° x 80° / Type II

LED MODULE SPECIFICATIONS

- LED Chips LUMILEDS 5050
- Color Temperature 3000K, 4000K, 5000K
- Color Rendering Index (CRI) >70
- L70 100,000 Hrs @ 25°C
- PCB Material Metal Core

FEATURES

- Safety Cut-Off Switch
- Clip Tool Free Opening
- Dimming 1-10V
- Spigot Adjustable 0-10°
- Nema Socket 7-pin (Upon Request)

COMPLIANCE STANDARD

- LED LM80, UL, RoHS
- Driver CE, EN62493, EN61347, EN50581,
EN55015, EN61000, EN61547,
EN62384

APPLICATION

- Pathways, Foot Paths, Parks, Car Parks, Access Ways,
Road Lightings, Residential Areas


MEASUREMENT & ORDER CODE

WATTAGE	LED QUANTITY	TYPICAL FLUX, LM	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H)mm	NETT WEIGHT
120W	48	17400	120W	795 x 390 x 180	9.3kg
150W	56	21500	152W	795 x 390 x 180	9.5kg
180W	64	25400	181W	795 x 390 x 180	9.7kg

* All measurement is base on 5000K CCT


DIMENSION

MURA-L

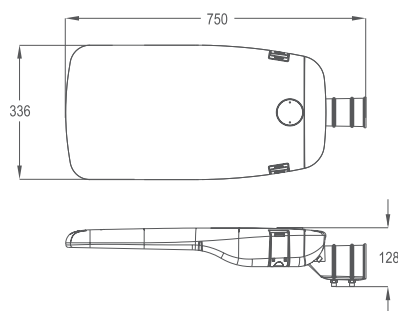

PHOTOMETRIC

MURA-L 150W




NIKKON®

MURA-XL STREET LANTERN



MURA-XL

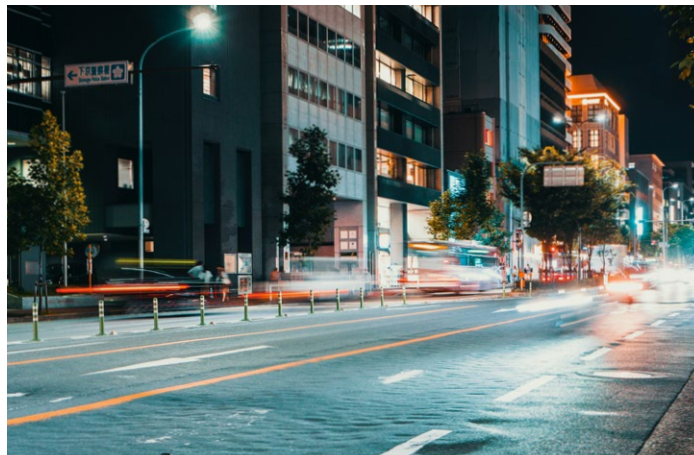

LUMINAIRE SPECIFICATIONS

- Power
 - 200W
 - 220W
 - 250W
 - 280W
 - 300W
- Fitting Material
 - Non-Corrosive-Die Cast Aluminium
- Fitting Color
 - White Aluminium, RAL9006
- Optical Cover
 - Clear Tempered Glass
- Ingress Protection
 - IP66
- Impact Protection
 - IK08
- Voltage
 - 220-240Vac 50 / 60Hz
- Electrical Safety Class
 - Class 1
 - Class 2 (Upon Request)
- Operating Temperature
 - 30 ~ +45°C
- Installation
 - Pole Top, Side Entry Ø60mm
- Surge Protection
 - 10KV, 20KA
- Beam Angle
 - 150° x 80° / Type II

LED MODULE SPECIFICATIONS

- LED Chips
 - LUMILEDS 5050
- Color Temperature
 - 3000K, 4000K, 5000K
- Color Rendering Index (CRI)
 - >70
- L70
 - 100,000 Hrs @ 25°C
- PCB Material
 - Metal Core

FEATURES

- Safety
 - Cut-Off Switch
- Clip
 - Tool Free Opening
- Dimming
 - 1-10V
- Spigot
 - Adjustable 0-10°
- Nema Socket
 - 7-pin (Upon Request)

COMPLIANCE STANDARD

- LED
 - LM80, UL, RoHS
- Driver
 - CE, EN62493, EN61347, EN50581, EN55015, EN61000, EN61547, EN62384

APPLICATION

- Pathways, Foot Paths, Parks, Car Parks, Access Ways, Road Lightings, Residential Areas


MEASUREMENT & ORDER CODE

WATTAGE	LED QUANTITY	TYPICAL FLUX, LM	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
200W	100	28900	200 W	935 x 445 x 215	12.3kg
220W	100	31100	220 W	935 x 445 x 215	12.3kg
250W	120	36600	252 W	935 x 445 x 215	12.8kg
280W	120	39900	282 W	935 x 445 x 215	12.8kg
300W	120	40300	306 W	935 x 445 x 215	12.8kg

* All measurement is base on 5000K CCT


DIMENSION

MURA-XL

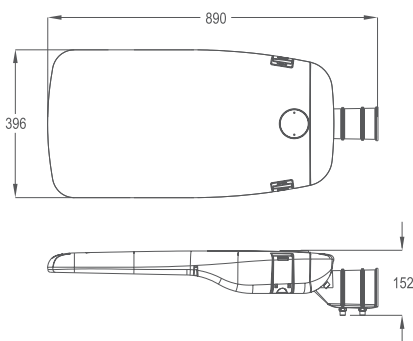

PHOTOMETRIC

MURA-XL 300W



ACHIEVING **LIVABLE CITY** ENVIRONMENT





HQ, MALAYSIA

SUCCESS ELECTRONICS & TRANSFORMER MANUFACTURER SDN. BHD.

199001009281 (200853-K)

(A wholly owned subsidiary of Success Transformer Corporation Berhad)

Hotline within Malaysia: 1300 88 2788

Tel : +603 6279 2800

Fax : +603 6157 2722

Website : www.success.com.my
www.nikkonlighting.com

Sales Enquiry

Domestic: ses@success.com.my

Overseas: export@success.com.my

GLOBAL NETWORKS

SINGAPORE

NIKKON LIGHTING & ELECTRICAL PTE. LTD.

Tel : +65 6742 4377

Fax : +65 6742 4366

Email : enquiry@nikkonlighting.com.sg

Website : www.nikkonlighting.com.sg

SINGAPORE

SUCCESS TRANSFORMER PTE. LTD.

Tel : +65 6742 4808

Fax : +65 6742 4708

Email : enquiry.stpl@success.com.my

Website : www.qpsttransformers.com

INDONESIA

PT BOXON NIKKON JAYAINDO

Tel : +62 21 2265 2860

Fax : +62 21 2265 2745

Email : marketing@nikkonlighting.co.id

Website : www.nikkonlighting.co.id

THAILAND

NIKKON LIGHTING (THAILAND) CO., LTD.

Email : export@success.com.my

Website : www.nikkonlighting.com



www.nikkonlighting.com

NIKKON® is a registered trademark of Success Electronics & Transformer Manufacturer Sdn. Bhd. (SUCCESS) in Malaysia and other countries. SUCCESS is a private limited company wholly owned by Success Transformer Corporation Berhad (STC). The company is incorporated in Malaysia with business registration number 199001009281 (200853-K) since 1980. SUCCESS is focusing in designing and distribution of industrial lighting, transformers & electrical apparatus and having its principal place of business at No. 3, 5 & 7, Jalan TSB 8, Taman Industri Sungai Buloh, 47000 Sungai Buloh, Selangor Darul Ehsan, West Malaysia. Company website: www.success.com.my / Corporate website: www.stcgroup.com.my.