

NIKKON SE Highbay

NIKKON®


N412G 15"
Reflector



8718 18"
Reflector



dimension

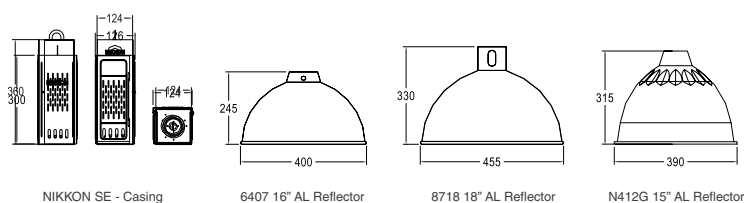

features

control gear housing

- high quality cold rolled steel complete with epoxy powder coating

reflector

- High purity anodized polished aluminium reflector

tempered glass

- optional visor can be mounted onto the reflector to provide safety purpose when used in public areas

others

- ceramic lamp holder and thermal resistant fiber glass wire

technical data


voltage • 220 ~ 240 Vac 50Hz

lamp wattage • 250W ~ 400W

holder type • E40 ceramic lamp holder


colour of housing • light grey

photometric curve




note: photometric result tested based on 24000lm HPMV 400W coated bulb c/w 8718 18" aluminium reflector

installation diagram

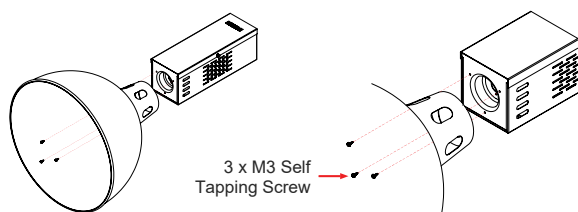

key for standard order coding

NIKKON SE - M - 0250 - 8718

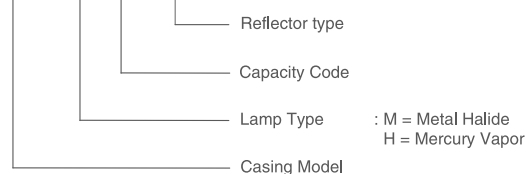

order code

casing model	lamp type	weight (kg)	order code
NIKKON SE	HPMV 250	4.3	NIKKON SE - H 0250
	HPMV 400	4.8	NIKKON SE - H 0400
	MH 250	4.4	NIKKON SE - M 0250
	MH 400	5.4	NIKKON SE - M 0400
reflector	model	weight (kg)	order code
aluminium reflector	N412G (15")	0.4	N412G
	6407 (16")	0.4	6407
	8718 (18")	0.6	8718

Note: All specifications are subject to change without prior notice for product improvement. Images are for illustrative purposes only.