

S2000

NIKKON®

220 - 240V 50 / 60Hz E40



features

electrical system

- built-in control gear suitable for HID lamps from 250W - 400W

housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating

reflector

- high purity anodized hammered finish aluminium reflector

glass

- thermal resistant tempered glass



mounting bracket

- steel mounting bracket coated with epoxy powder

technical data


ingress protection • IP65
voltage • 220 - 240 Vac 50 / 60Hz
lamp wattage • 250W - 400W
holder type • E40
maximum weight • 9 kg
colour of housing • black

photometric curve



note : photometric result tested based on 32000lm MH 400W clear tube

dimension

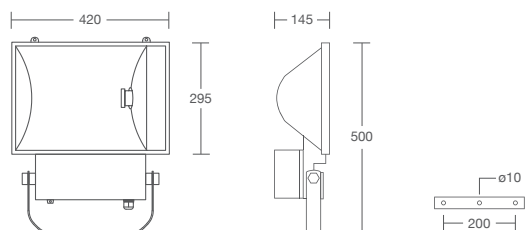

key for standard order coding

S2000 SY - M 0400	capacity code	: example = 400W
	lamp type	: S = high pressure sodium : M = metal halide
	reflector model	: SY = symmetrical : ASY = asymmetrical
	casing model	

order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S2000 SY MH 250W (2.1A)	tubular	E40	475 x 430 x 165	S2000-M0250
S2000 SY MH 400W	tubular	E40	475 x 430 x 165	S2000-M0400
S2000 SY HPS 250W	tubular	E40	475 x 430 x 165	S2000-S0250
S2000 SY HPS 400W	tubular	E40	475 x 430 x 165	S2000-S0400

* S2000 asymmetrical type floodlight is available upon request.

Note: All specifications are subject to change without prior notice for product improvement. Images are for illustrative purposes only.