


S2030

NIKKON®

220 - 240V 50 / 60Hz E40

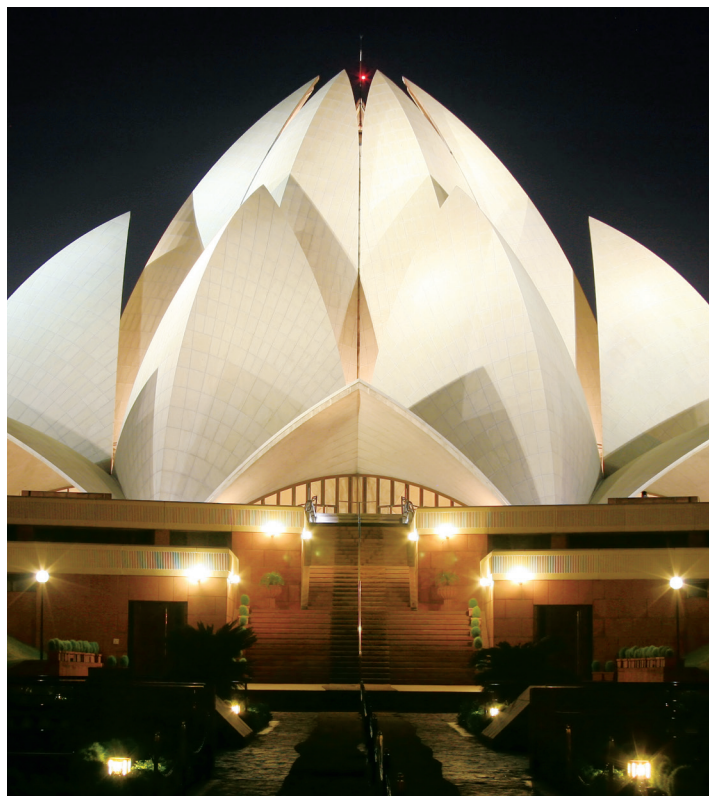

features

housing

- high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating

reflector

- high purity anodized hammered aluminium reflector

glass

- thermal resistant tempered glass

mounting bracket

- steel mounting bracket coated with epoxy powder

colour of housing

- black

technical data

ingress protection • IP65


voltage • 220 - 240 Vac 50 / 60Hz

lamp wattage • 250W - 400W


lamp holder • E40

maximum weight • 10.0 kg

photometric curve




S2030 - Wide beam



note : photometric result tested based on 32000lm MH 400W clear tube

dimension

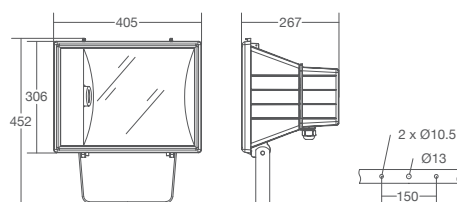

key for standard order coding

S2030	-	S	0250	capacity code	: example = 250W
				lamp type	: S = high pressure sodium : M = metal halide : H = mercury vapor
				casing model	

order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S2030 MH 250W (2.1A)	tubular	E40	410 x 340 x 300	S2030 - M0250
S2030 MH 400W	tubular	E40	410 x 340 x 300	S2030 - M0400
S2030 HPS 250W	tubular	E40	410 x 340 x 300	S2030 - S0250
S2030 HPS 400W	tubular	E40	410 x 340 x 300	S2030 - S0400
S2030 HPMV 250W	bulb	E40	410 x 340 x 300	S2030 - H0250
S2030 HPMV 400W	bulb	E40	410 x 340 x 300	S2030 - H0400