

S3000

NIKKON®


220 - 240V 50 / 60Hz E40




IP65



dimension

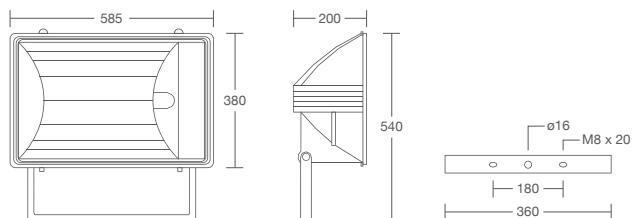

photometric curve

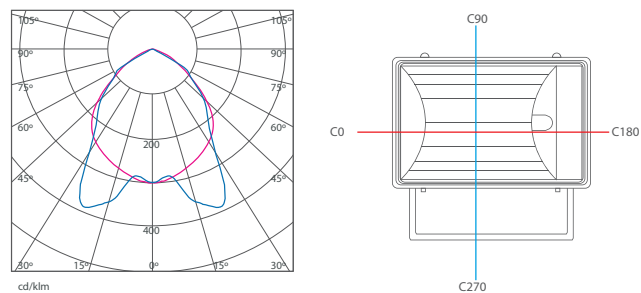

order code

model	lamp type	lamp holder	carton dimension (L x W x H) mm	order code
S3000 MH 1000W	tubular	E40	600 x 510 x 230	S3000-M1000
S3000 HPS 1000W	tubular	E40	600 x 510 x 230	S3000-S1000
accessories	housing material		IP rated	order code
remote control gear (MH 1000W)	steel c/w epoxy powder		IP43	S5100 UC-M1000
remote control gear (HPS 1000W)	steel c/w epoxy powder		IP43	S5100 UC-S1000
remote control gear (MH 1000W)	die-cast aluminium		IP65	S5100 UA-M1000
remote control gear (HPS 1000W)	die-cast aluminium		IP65	S5100 UA-S1000


features

- housing**
 - high pressure aluminium die-cast housing with AKzo Nobel Interpon outdoor epoxy powder coating
- reflector**
 - high purity anodized hammered finish aluminium reflector
- glass**
 - thermal resistant tempered glass
- mounting bracket**
 - steel mounting bracket coated with epoxy powder
- lamp holder**
 - E40 lamp holder conforming to EN / VDE standard

technical data

ingress protection • IP65 (lamp fitting)
 voltage • 220 - 240 Vac 50 / 60Hz
 lamp wattage • MH 1000W & HPS 1000W
 holder type • E40
 floodlight maximum weight • 11.6 kg
 control gear maximum weight • S5100-M1000: 14 kg / S5100-S1000: 15.5 kg
 colour of housing • black

accessories

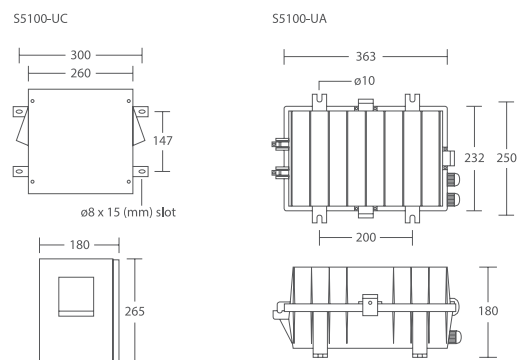

key for standard order coding

S3000 - S 1000 — capacity code : example = 1000W
 — lamp type : S = high pressure sodium
 : M = metal halide
 — casing model