



LUMINAIRE SPECIFICATIONS

• Power	30W 40W 60W
• Fitting Material	Non-Corrosive Die-Cast Aluminium
• Fitting Color	Dark Gray, Akzo Nobel RAL7012
• Optical Cover	95% Transparency Tempered Glass
• Ingress Protection	IP66
• Impact Protection	IK08
• Voltage	220 ~ 240 Vac 50 / 60Hz
• Electrical Safety Class	Class I
• Operating Temperature	-30 ~ +45°C
• Installation	Ø42 - 60mm Side Entry * Post Top Spigot is Available Upon Request.
• Surge Protections	10KV, 20KA

OPTIONAL FEATURES (UPON REQUEST)

• Driver	1-10V Dimming
• Control	Intelligent Light Control System
• Sensor	Mini Photocell

LED MODULE SPECIFICATIONS

• Color Temperature	3000K Warm White 4000K Neutral White 5000K Cool White
• Color Rendering Index (CRI)	>70
• L70	100,000 Hrs @ 25°C
• PCB Material	Ceramic (Alumina Substrate)
• PCB Trace	Silver Conductor (Ag)
• SMD Connector	WAGO 2060 Series

COMPLIANCE STANDARD

• LED	LM80, UL, RoHS
• Driver	CE, EN62493, EN61347, EN50581, EN55015, EN61000, EN61547
• Luminaire	LM79, EN60598-1, EN60598-2-3, EN62493, EN55015, EN61547, EN61000, EN62471



APPLICATION

- Pathways, Parks, Car Parks, Foot Paths, Access Ways, Road Lightings & Residential Areas


MEASUREMENT & ORDER CODE

WATTAGE	ORDER CODE	NO. OF LEDS	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
30W	K09360 30W	14	4150	34	600 x 245 x 158	4.0 kg
40W	K09360 40W	18	5660	42	600 x 245 x 158	4.0 kg
60W	K09360 60W	28	8200	66	600 x 245 x 158	4.2 kg


* Please indicate LED color temperature when ordering.
* All result tested base on 5000K CCT LEDs.



DIMENSION

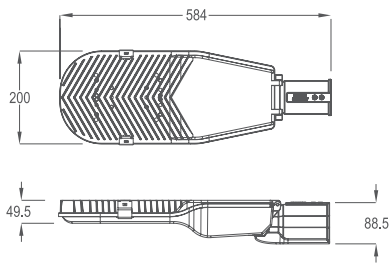


Light Control Unit



PHOTOMETRIC

K09360 60W



Note: All specifications are subject to change without prior notice for product improvement. Images, pictures, and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.