



LUMINAIRE SPECIFICATIONS

• Power	30W 40W 60W
• Fitting Material	Non-Corrosive Die-Cast Aluminium
• Fitting Color	Dark Gray, Akzo Nobel RAL7012
• Optical Cover	95% Transparency Tempered Glass
• Ingress Protection	IP66
• Impact Protection	IK08
• Voltage	220 ~ 240 Vac 50 / 60Hz
• Electrical Safety Class	Class I
• Operating Temperature	-30 ~ +45°C
• Installation	Ø42 - 60mm Side Entry * Post Top Spigot is Available Upon Request.
• Surge Protections	10KV, 20KA

OPTIONAL FEATURES (UPON REQUEST)

• Driver	1-10V Dimming
• Control	Intelligent Light Control System
• Sensor	Mini Photocell

LED MODULE SPECIFICATIONS

• Color Temperature	3000K Warm White 4000K Neutral White 5000K Cool White
• Color Rendering Index (CRI)	>70
• L70	100,000 Hrs @ 25°C
• PCB Material	Ceramic (Alumina Substrate)
• PCB Trace	Silver Conductor (Ag)
• SMD Connector	WAGO 2060 Series

COMPLIANCE STANDARD

• LED	LM80, UL, RoHS
• Driver	CE, EN62493, EN61347, EN50581, EN55015, EN61000, EN61547
• Luminaire	LM79, EN60598-1, EN60598-2-3, EN62493, EN55015, EN61547, EN61000, EN62471



APPLICATION

- Pathways, Parks, Car Parks, Foot Paths, Access Ways, Road Lightings & Residential Areas


MEASUREMENT & ORDER CODE

WATTAGE	ORDER CODE	NO. OF LEDS	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
30W	K09360 30W	14	4150	34	600 x 245 x 158	4.0 kg
40W	K09360 40W	18	5660	42	600 x 245 x 158	4.0 kg
60W	K09360 60W	28	8200	66	600 x 245 x 158	4.2 kg


* Please indicate LED color temperature when ordering.
* All result tested base on 5000K CCT LEDs.



DIMENSION

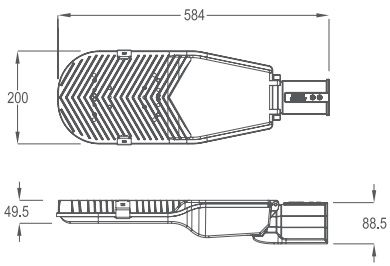


Light Control Unit



PHOTOMETRIC

K09360 60W



Note: All specifications are subject to change without prior notice for product improvement. Images are for illustrative purposes only.