

NIKKON®

LEDXION S466
LED STREET LANTERN

PRODUCT INTRODUCTION

NIKKON®



Robust Housing

- Die-Cast Aluminium
- Epoxy Powder Coating
- Akzo Nobel Interpon Color
- Ultraviolet Protection
- Isolated Lamp & Gear Compartment
- Stainless Steel Fasteners



Optical Versatility

- Type I, II, III, IV, V & ASY
- Applications:

Rural, Urban & Ring Roads, Carpark, Expressways, Sport Lightings, Jetties & Ports



Dynamic Thermal Control

- Dynamic Heat Fins Design
- External Cooling Fins
- Withstand High Temperature
- Ventilation Vent Included



Weatherproof Sealant

- Withstand Harsh Outdoor Environment
- Silicon Rubber Material
- IP66 Rating



Spigot Flexibility

- Ø60mm Pole Size
- Tilttable 0° - 10° Angle Adjustment
- Side Entry or Post Top
- 120mm Depth for Better Safety
- Stretchable Material Suitable Impact
- Stop-Locking Mechanism



Electronic Control

- NEMA Twist Photocell Receptable
- Dimming & Timer Control Power Supply
- Intelligent Light Control System (iLCS)



S466 SPECIFICATIONS

LUMINAIRE TECHNICAL SPECIFICATIONS


• System Power	200W 250W 300W 350W
• Fitting Material	Non-Corrosive Die-cast Aluminium
• Optical Cover	High Transparency Tempered Glass
• Ingress Protection	IP66
• Impact Protection	IK08
• Voltage	220 ~ 240 Vac 50 / 60Hz
• Electrical Safety Class	Class I
• Operating Temperature	-30 ~ +50°C
• Surge Protection	10KV, 20KA
• Installation	Ø60mm Side Entry Ø60mm Post Top Mounting Bracket
• Nett Weight	18 kg
• Carton Size	840 (L) x 540 (W) x 275 (H)

APPLICATION


- Motorways, Municipal Areas, Expressways, High-Masts, Sports Arena & Courts, Carparks, Jetties & Ports

DIMENSION


SIDE ENTRY

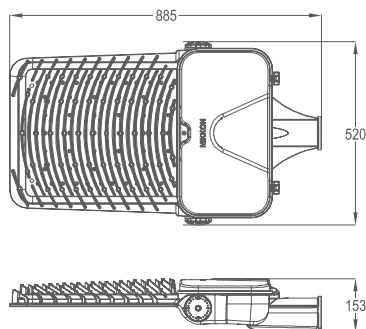



POST TOP

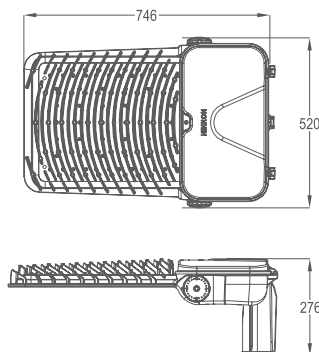

MOUNTING BRACKET

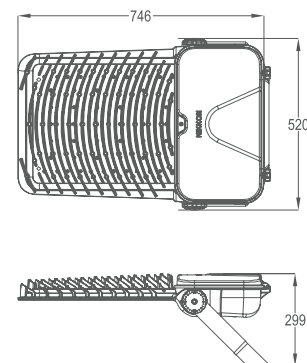

Light Control Unit

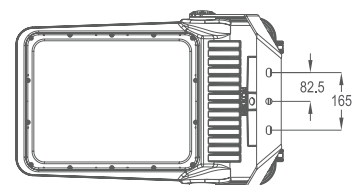

OPTIONAL FEATURES

• LED Drivers	1-10V Dimming, Full Programmable
• Control System	iLCS (Intelligent Light Control System)
• Installation	Mounting Bracket (Highmast Lighting)
• Lens (Optional) by LEDiL	Type I, Type II, Type III, Type IV , Type V & ASY * Special distribution lens upon request.

LED MODULE SPECIFICATIONS

• LEDs	High Power LEDs
• Color Temperature	3000K, 4000K & 5000K
• L70	100,000 Hrs @ 25°C
• PCB Material	Ceramic (Alumina Substrate)
• Lens Efficiency	93%
• Lm/W	Up to 124 lm/W

COMPLIANCE STANDARD


• LED	LM 80
• Driver	CE, EN 55015, EN 61000, EN 61547, IEC 61347, EN 62493, IEC 60598, EN 50581, IEC 62384
• Luminaire	EN 61000, EN 55015, EN 61547, EN 60598, EN 62471, EN 62493, IEC 62722, LM79, CISPR15

* Please indicate series, color temperature, angle and wattage when ordering.

Note: All specifications are subject to change without prior notice for product improvement. Images, pictures and illustrations used are for illustrative purposes only and the color printed in the brochure may differ from the actual product.




TYPE I - Rural Road

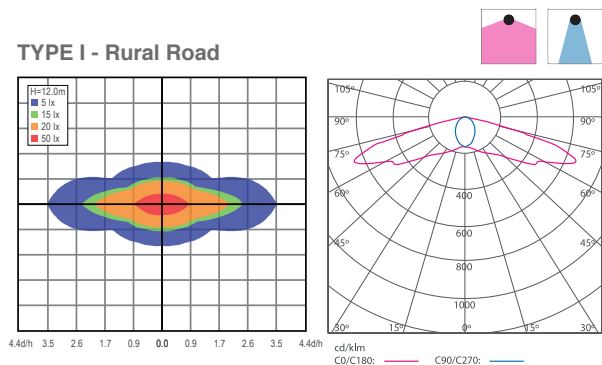


WATTAGE	200W	250W	300W	350W
TYPICAL LUMINOUS FLUX	26770 lm	32800 lm	40080 lm	44620 lm

TYPE II - Urban Road

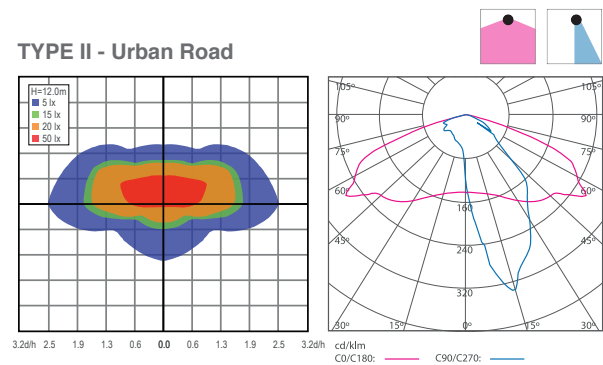


WATTAGE	200W	250W	300W	350W
TYPICAL LUMINOUS FLUX	24890 lm	30640 lm	36770 lm	41160 lm

TYPE III - Expressway

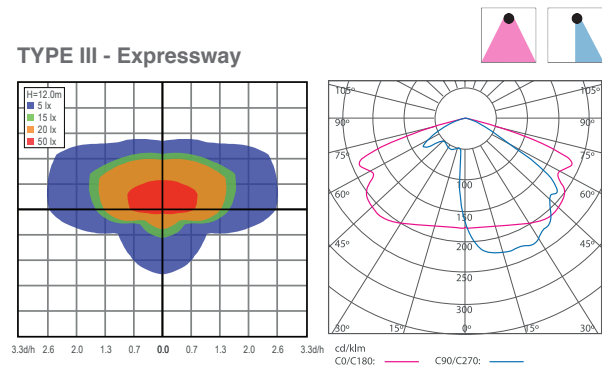


WATTAGE	200W	250W	300W	350W
TYPICAL LUMINOUS FLUX	26090 lm	32290 lm	38760 lm	43530 lm

TYPE IV - Large Area, High-Mast

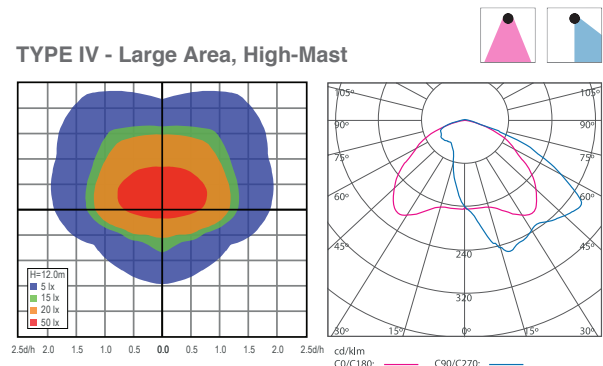


WATTAGE	200W	250W	300W	350W
TYPICAL LUMINOUS FLUX	25490 lm	31910 lm	38120 lm	42830 lm

TYPE V - Carpark & Roundabout

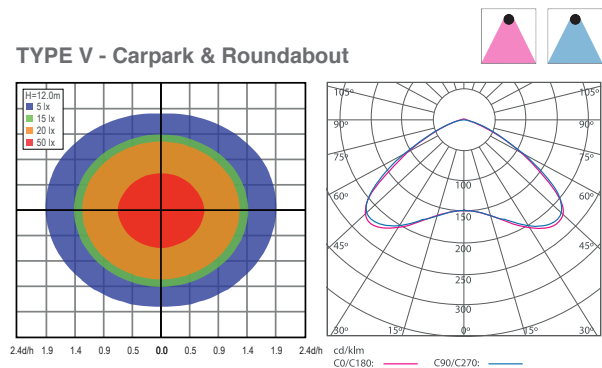

WATTAGE	200W	250W	300W	350W
TYPICAL LUMINOUS FLUX	25890 lm	32130 lm	38660 lm	43610 lm

TYPE ASY - High-Mast & Sport Lighting

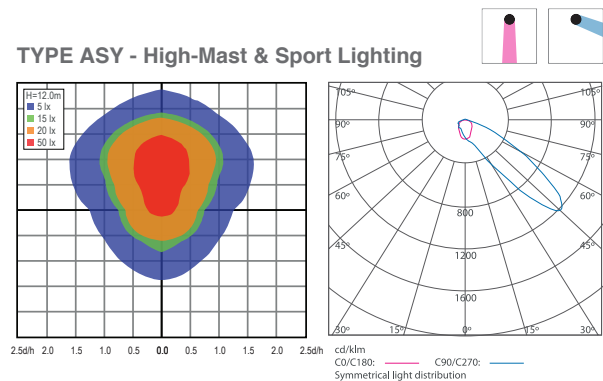

WATTAGE	200W	250W	300W	350W
TYPICAL LUMINOUS FLUX	27100 lm	33640 lm	39900 lm	45420 lm



Our cities are rapidly transforming into artificial ecosystems of interconnected and interdependent intelligent digital organisms. Fast urbanization plays an integral role in economic and societal progress which represents the fundamentals of new technological condition confronting architects and product designers. Traffic congestion, energy usage, public safety and establishing sustainable communities are the few key challenges faced by cities. As such, development and implementations of intelligent solutions are needed.

Smart cities are measured by the integration of their infrastructure and the intelligent solutions which they tackle challenges. Constant attention to providing a better quality of life and vibrant economic climate is essential to engage and attract new residents, businesses and visitors. Our Intelligent Light Control System (iLCS) introduces a modular approach, with the energy saving generated by remote controls for street lightings. This will create a new neural infrastructure network ready to obtain and collect necessary data to activate intelligent solutions.

GLOBAL UNIQUE ADVANTAGES

Wireless Mesh Network

- Auto mesh networking between Light Control Unit (LCU)
- Low latency communication with response <1 second, thousands of luminaires could be turned on in a few milliseconds
- Message priority (QOS), messages with high priority are delivered and goes through the network before others
- Same platform for street lighting-industrial-indoor

Plug and Play GPS Mapping


- LCUs embedded with GPS, automatic geolocation of light point
- Real time clock on LCU directly synchronized with GPS satellites
- Sunset and sunrise time is automatically calculated from the GPS coordinates directly in LCU
- Autonomous operation with weekly profile considering GPS coordinates and astronomical clock

Real Time Control, Metering and Alerts

- Real time control of each luminaire
- Dimming for exact consumption
- Real time measurements of consumption
- Real time alerts provide information on luminaire failure, tracking abnormal energy use
- Detailed working time counters

Installation Features

- Possibility to use a portable device to turn on/off/dim manually a certain area of nodes for diagnostics or installation purposes
- Factory default profile with autonomous weekly program
- External input sensors (3 ADC 0-30V dynamic range)
- Controlled auxiliary output (for advertisement displays)

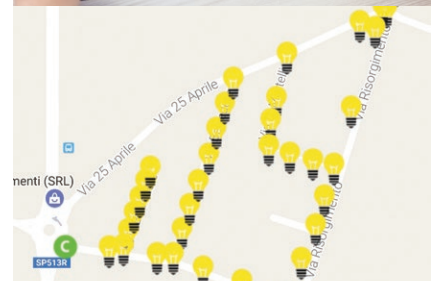



HQ, MALAYSIA

SUCCESS ELECTRONICS & TRANSFORMER MANUFACTURER SDN. BHD.

199001009281 (200853-K)

(A wholly owned subsidiary of Success Transformer Corporation Berhad)

Hotline within Malaysia: 1300 88 2788

Tel : +603 6279 2800

Fax : +603 6157 2722

Website : www.success.com.my
www.nikkonlighting.com

Sales Enquiry

Domestic: ses@success.com.my

Overseas: export@success.com.my



www.nikkonlighting.com

GLOBAL NETWORKS

SINGAPORE

NIKKON LIGHTING & ELECTRICAL PTE. LTD.

Tel : +65 6742 4377

Fax : +65 6742 4366

Email : enquiry@nikkonlighting.com.sg

Website : www.nikkonlighting.com.sg

SINGAPORE

SUCCESS TRANSFORMER PTE. LTD.

Tel : +65 6742 4808

Fax : +65 6742 4708

Email : enquiry.stpl@success.com.my

Website : www.qpsttransformers.com

INDONESIA

PT BOXON NIKKON JAYAINDO

Tel : +62 21 2265 2860

Fax : +62 21 2265 2745

Email : marketing@nikkonlighting.co.id

Website : www.nikkonlighting.co.id

THAILAND

NIKKON LIGHTING (THAILAND) CO., LTD.

Email : export@success.com.my

Website : www.nikkonlighting.com

NIKKON® is a registered trademark of Success Electronics & Transformer Manufacturer Sdn. Bhd. (SUCCESS) in Malaysia and other countries. SUCCESS is a private limited company wholly owned by Success Transformer Corporation Berhad (STC). The company is incorporated in Malaysia with business registration number 199001009281 (200853-K) since 1980. SUCCESS is focusing in designing and distribution of industrial lighting, transformers & electrical apparatus and having its principal place of business at No. 3, 5 & 7, Jalan TSB 8, Taman Industri Sungai Buloh, 47000 Sungai Buloh, Selangor Darul Ehsan, West Malaysia. Company website: www.success.com.my / Corporate website: www.stcgroup.com.my.