

DRACO UF3 MOTION SENSOR HIGHBAY



Motion Sensor
(Upon Request)

LUMINAIRE SPECIFICATIONS

- Power 100W
150W
200W
240W
300W
- Fitting Material Non-Corrosive Die-Cast Aluminium
- Fitting Color Black
- Optical Cover PC Cover
- Ingress Protection IP65
- Voltage 220 ~ 240Vac 50 / 60 Hz
- Electrical Safety Class Class I
- Operating Temperature -30 ~ +45°C
- Installation Hook Mounting
- Pre-Wire 300mm
- Beam Angle 90D (240W, 300W)
120D (100W, 150W, 200W)

LED MODULE SPECIFICATIONS

- Color Temperature 5700K Daylight
- Color Rendering Index (CRI) ≥80
- L70 100,000 Hrs @ 25°C

COMPLIANCE STANDARD

- LED LM80
- Driver CE, EN/IEC 61347, EN55015, EN61547, EN61000, EN62493, EN62384, UL

APPLICATION

- Eateries, Retails, Hallways, Storage Rooms & Halls

OPTIONAL FEATURES (UPON REQUEST)


- Sensor
 - Motion (Plug & Play) (Except for 300W)
 - Mounting Height up to 15m with 12m Range Radius
 - Control with a Remote Control
 - Minimum dimming level is 10%

MEASUREMENT & ORDER CODE

WATTAGE	ORDER CODE	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE	CARTON DIMENSION (L x W x H) mm	NETT WEIGHT
100W	UF3 100W	16000	100	435 × 435 × 260	3.9 kg
150W	UF3 150W	24000	150	435 × 435 × 260	3.9 kg
200W	UF3 200W	32000	200	435 × 435 × 260	4.1 kg
240W	UF3 240W	38400	240	435 × 435 × 260	4.3 kg
300W	UF3 300W	48000	300	435 × 435 × 260	5.2 kg


* Please indicate beam angle when ordering.

* All result tested base on 5700K CCT LEDs.

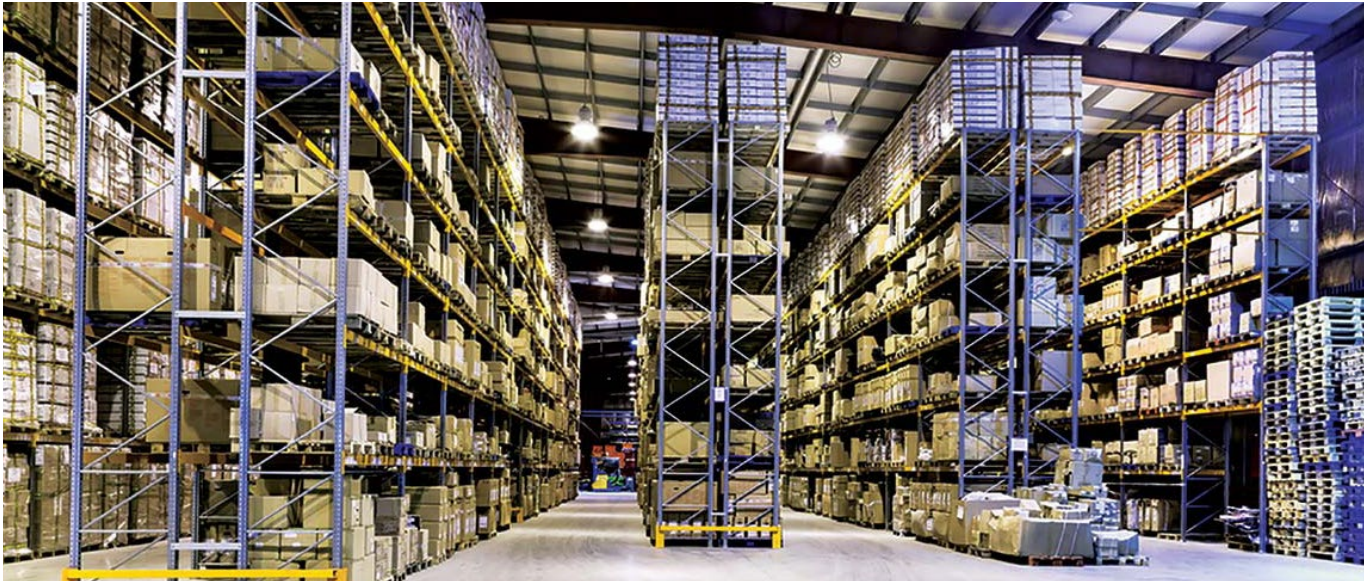


DIMENSION

100W / 150W
200W / 240W

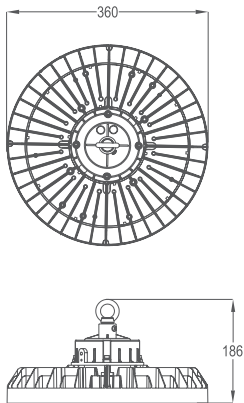


300W

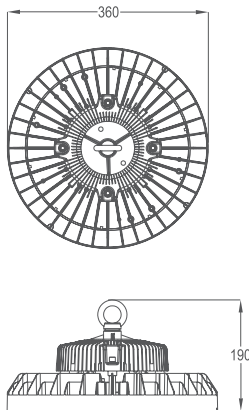


PHOTOMETRIC

90D



120D



Note: All specifications are subject to change without prior notice for product improvement. Images, pictures, and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.