

NIKKON®

DRACO UF5 LED Highbay



PC Reflector with Visor
(Upon Request)

LUMINAIRE SPECIFICATIONS

- **Power** 100W
150W
200W
- **Fitting Material** Non-Corrosive Die-Cast Aluminium
- **Fitting Color** Black
- **Fitting Optic** PC Cover lens
- **Ingress Protection** IP65
- **Voltage** 220 ~ 240 Vac 50 / 60Hz
- **Electrical Safety Class** Class I
- **Operating Temperature** -30 ~ +50°C
- **Installation** Hook Mounting
- **Pre-Wire** 300mm
- **Surge Protection** 10KV, 5KA (External)
- **Safety Chain** 500mm

LED MODULE SPECIFICATIONS

- **Color Temperature** 5700K
- **Color Rendering Index (CRI)** Ra ≥80
- **L70** 100,000 Hrs @ 25°C

COMPLIANCE STANDARD

- **LED** LM80
- **DRIVER** EN/IEC 61347, EN/IEC 55015, EN61547, EN/IEC61000
- **LUMINAIRE** IEC 60598-1, IEC 60598-2-1

APPLICATION

- Warehouse, Supermarket, Exhibition Center, Gym Room, Shopping Mall, Library

OPTIONAL FEATURES (UPON REQUEST)

- **Reflector** PC Reflector with Visor (11 inches)

MEASUREMENT & ORDER CODE


WATTAGE	ORDER CODE	TYPICAL LUMINOUS FLUX	TYPICAL WATTAGE	QTY / CARTON	NETT WEIGHT (PER UNIT)	CARTON DIMENSION (L x W x H) mm
100W	UF5 100W	14500lm	100W	1pc/ctn	1.5 kg	245 x 245 x 165
150W	UF5 150W	22500lm	150W	1pc/ctn	1.7 kg	260 x 260 x 175
200W	UF5 200W	30000lm	200W	1pc/ctn	2.2 kg	290 x 290 x 180

* All result tested base on 5700K CCT LEDs.




DIMENSION


UF5 100W

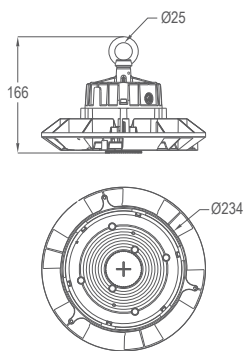


UF5 150W

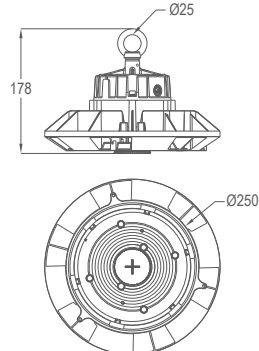


UF5 200W

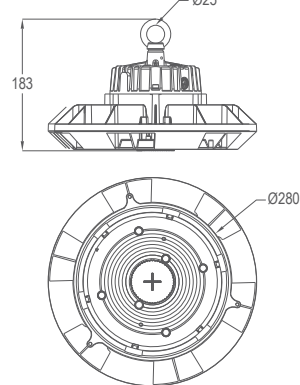

PC Reflector

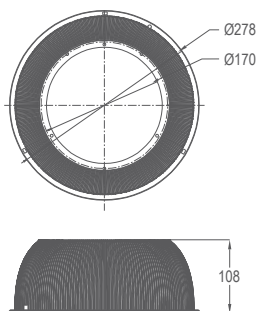


PC Visor

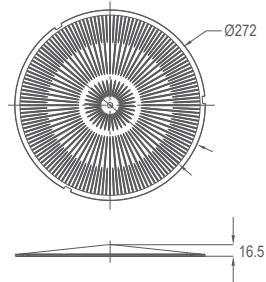


PHOTOMETRIC


UF5 100W

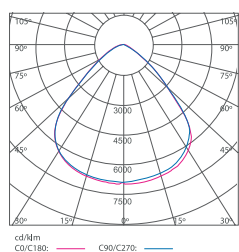

UF5 150W

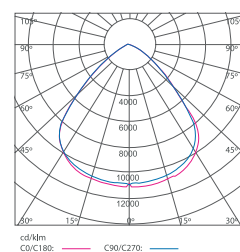

UF5 200W

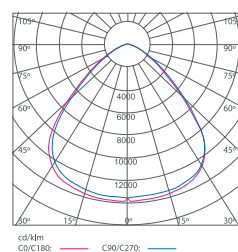

Note: All specifications are subject to change without prior notice for product improvement. Images, pictures, and illustrations used are for illustrative purposes only and the color printed may differ from the actual product.